



Gauge Cock

35MPa

Features


- ① Ultra-compact configuration requires minimal installation space.
- ② Intelligent design packs plenty of function into a simple configuration.
- ③ Maximum operating pressure of 35MPa{357kgf/cm²} allows operation across a wide range.

Specifications

Model No.		G "A" (Nominal Dimension)	B mm	C mm	Maximum Working Pressure MPa{kgf/cm ² }	Weight kg
Float Type	Flange Type					
K2-T02-11	K2-F02-11	G1/4	10	19	21 {214}	0.35
K2-T03-10	K2-F03-10	G3/8	16	23	35 {357}	
K2-T04-10	K2-F04-10	G1/2	16	26		


Explanation of model No.

K2 - T 02 - 10(11)

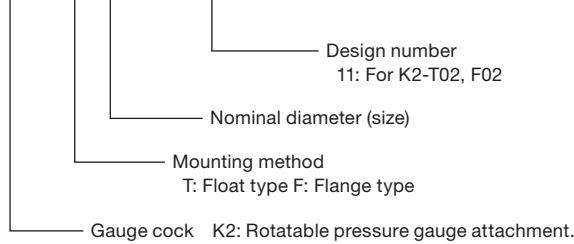


Installation Dimension Drawings

K2-T**-10 (11)

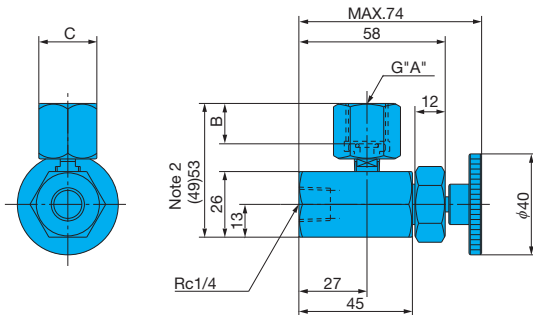

K2-F**-10 (11)

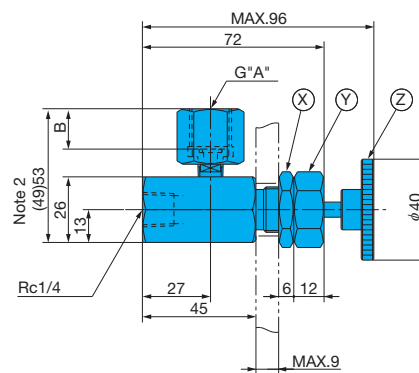

- Note) 1. Maximum iron plate thickness: 9t; Mounting Bolt Hole Diameter: φ20 When mounted to panel
Loosen the (X) lock nut and (Y) cap nut, and pull out the (Z) adjusting screw.
To return to its original position, reverse this process.
2. Dimensions in parentheses are for the 02 size.

3. For information about G "A" and B, see the specifications. The Oring shown below is used as a pressure gauge seal beneath screw G.
G1/4 JIS B2401-1B-P5
G3/8 JIS B2401-1B-P6
G1/2 JIS B2401-1B-P9