

MZ Collaborative Robot

Model: CMZ05-01

**Add collaborative robot functions
to the high speed, high accuracy,
and reliability of the MZ series**



Collaborative Rated

- Compliant with various certifications to ensure safety as a collaborative robot (ISO13849-1, ISO10218-1, ISO/TS15066)
- Shape design and software functions that minimize the risk of getting caught

High speed & High precision

- Achieves top-class high-speed and high-accuracy with the same mechanism as the MZF series.
(2500 mm/s when not collaborating)

Supports various industries

- (protection grade: equivalent to IP67)
- The risk of contact with the workpiece is reduced by the hollow wrist and the wiring and piping inside the arm
- Abundant applications for various industries



Basic Specification of Robot

Item	Specification		
Model	CMZ05-01		
Structure	Articulated robot		
Axis	6		
Drive System	AC servo motor		
Maximum motion range	J1	±2.97rad (±170°)	
	J2	Initialization	-2.00 ~ +0.69rad (-115 ~ +40°)
		MAX *1	-2.36 ~ 1.40rad (-135 ~ +80°)
	J3	-2.48 ~ 2.69rad (-142 ~ +154°)	
	J4	Initialization	±3.32rad (±190°)
		MAX *1	±1.57rad (±90°)
Maximum Velocity	J6	±6.28rad (±360°)	
	J1	4.71rad/s (270°/s)	
	J2	4.28rad/s (245°/s)	
	J3	5.42rad/s (310°/s)	
	J4	9.60rad/s (550°/s)	
	J5	9.60rad/s (550°/s)	
TCP speed	Non-collaborative	2500mm/s	
	Collaborative	1000mm/s *2	
Maximum Payload	Wrist	5kg	
Maximum static load torque	J4	16.9N·m	
	J5	16.9N·m	
	J6	9.4N·m	
Maximum moment of inertia	J4	0.49kg·m ²	
	J5	0.49kg·m ²	
	J6	0.15kg·m ²	
Position repeatability *3		±0.020mm	
Maximum Reach		927 mm	
Air tubes	φ6×2 (3 solenoid valves installed as standard) Available pressure range: 0.1 ~ 0.5MPa		
Application cables	20 core or 12 core (Depends on option selection)		
LAN	None, 8 core 1 line, 8 core 2 line (Depends on option selection)		
Installation	Floor/Inverted		
Mounting Condition	Ambient Temperature: 0 ~ 40°C		
	Ambient Humidity: 20 ~ 85%RH (No dew or frost allowed) Vibration: Not more than 0.5G (4.9m/s ²)		
Protection class	IP 67 equivalent (dust-proof, liquid-resistant)		
Clean rating	Equivalent ISO CLASS 4 *4		
Noise Level	75dB		
Robot weight	53kg		

1[rad]=180/π[°], 1[N·m]=1/9.8[kgf·m]


*1 The scope of operation must be determined by risk assessment.

*2 Operating speed must be determined by risk assessment.

*3 Compliant with JIS B 8432.

*4 Compliant with ISO14644-1

Dimensions and operating range

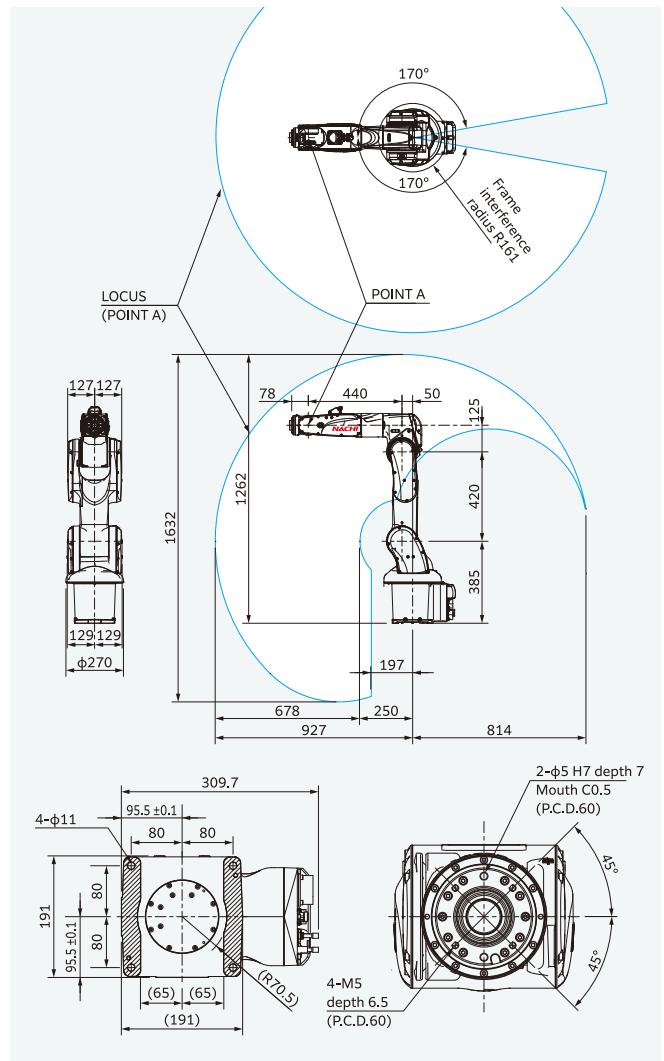

I/O 20 core, LAN 8 core 1 Line



Collaborative mode indicator lamp



Stopper cover that reduces the risk of getting caught



Offset shape that reduces the risk of getting caught

NACHI

NACHI-FUJIKOSHI CORP.

www.nachi-fujikoshi.co.jp

Head Office Shiodome Sumitomo Bldg, 17F, 1-9-2 Higashi-Shinbashi, Minato-ku, Tokyo 105-0021
Robot Division 1-1-1 Fujikoshi-Honmachi, Toyama 930-8511, JAPAN

Tel: +81-(0)3-5568-5111
Tel: +81-(0)76-456-2223

Fax: +81-(0)3-5568-5206
Fax: +81-(0)76-493-5253

NACHI AMERICA INC. DETROIT BRANCH
NACHI EUROPE GmbH
NACHI TECHNOLOGY (THAILAND) CO., LTD.
NACHI TECHNOLOGY INDIA PRIVATE LIMITED
GURGAON HEAD OFFICE
BANGALORE OFFICE
PT.NACHI INDONESIA
NACHI-FUJIKOSHI(CHINA) CO., LTD.

Michigan, U.S.A.
GERMANY
THAILAND
INDIA

Tel: +1-248-305-6545
Tel: +49-(0)2151-65046-0
Tel: +66-2-258-4101

Tel: +91-92160-33031
Tel: +91-90018-48490
Tel: +62-021-527-2841
Tel: +86-(0)21-6915-2200

Fax: +1-248-305-6542
Fax: +49-(0)2151-65046-90
Fax: +66-2-258-4103

Fax: +62-021-527-3029
Fax: +86-(0)21-6915-5427

<https://www.nachirobotics.com>
<https://www.nachi.de/>
<https://www.nachi-india.com/>

<https://www.nachi.com.cn/>

* The specifications are subject to changes without notice.

* In case that an end user uses this product for military purpose or production of weapon, this product may be liable for the subject of export restriction stipulated in the Foreign Exchange and Foreign Trade Act. Please go through careful investigation and necessary formalities for export.

VOC FREE T&K
Printed with Volatile Organic Compounds, VOC, Free Ink.

CATALOG NO. R7712E-5

2026.5,*-MD-ABE