

ものづくりの世界に革命を起こす

アクアREVOドリル


スタブ/レギュラ/セミロング

AquaREVO Drills Stub/Regular/Semi-long

AQRVDS

AQRVDR

AQRVDSL

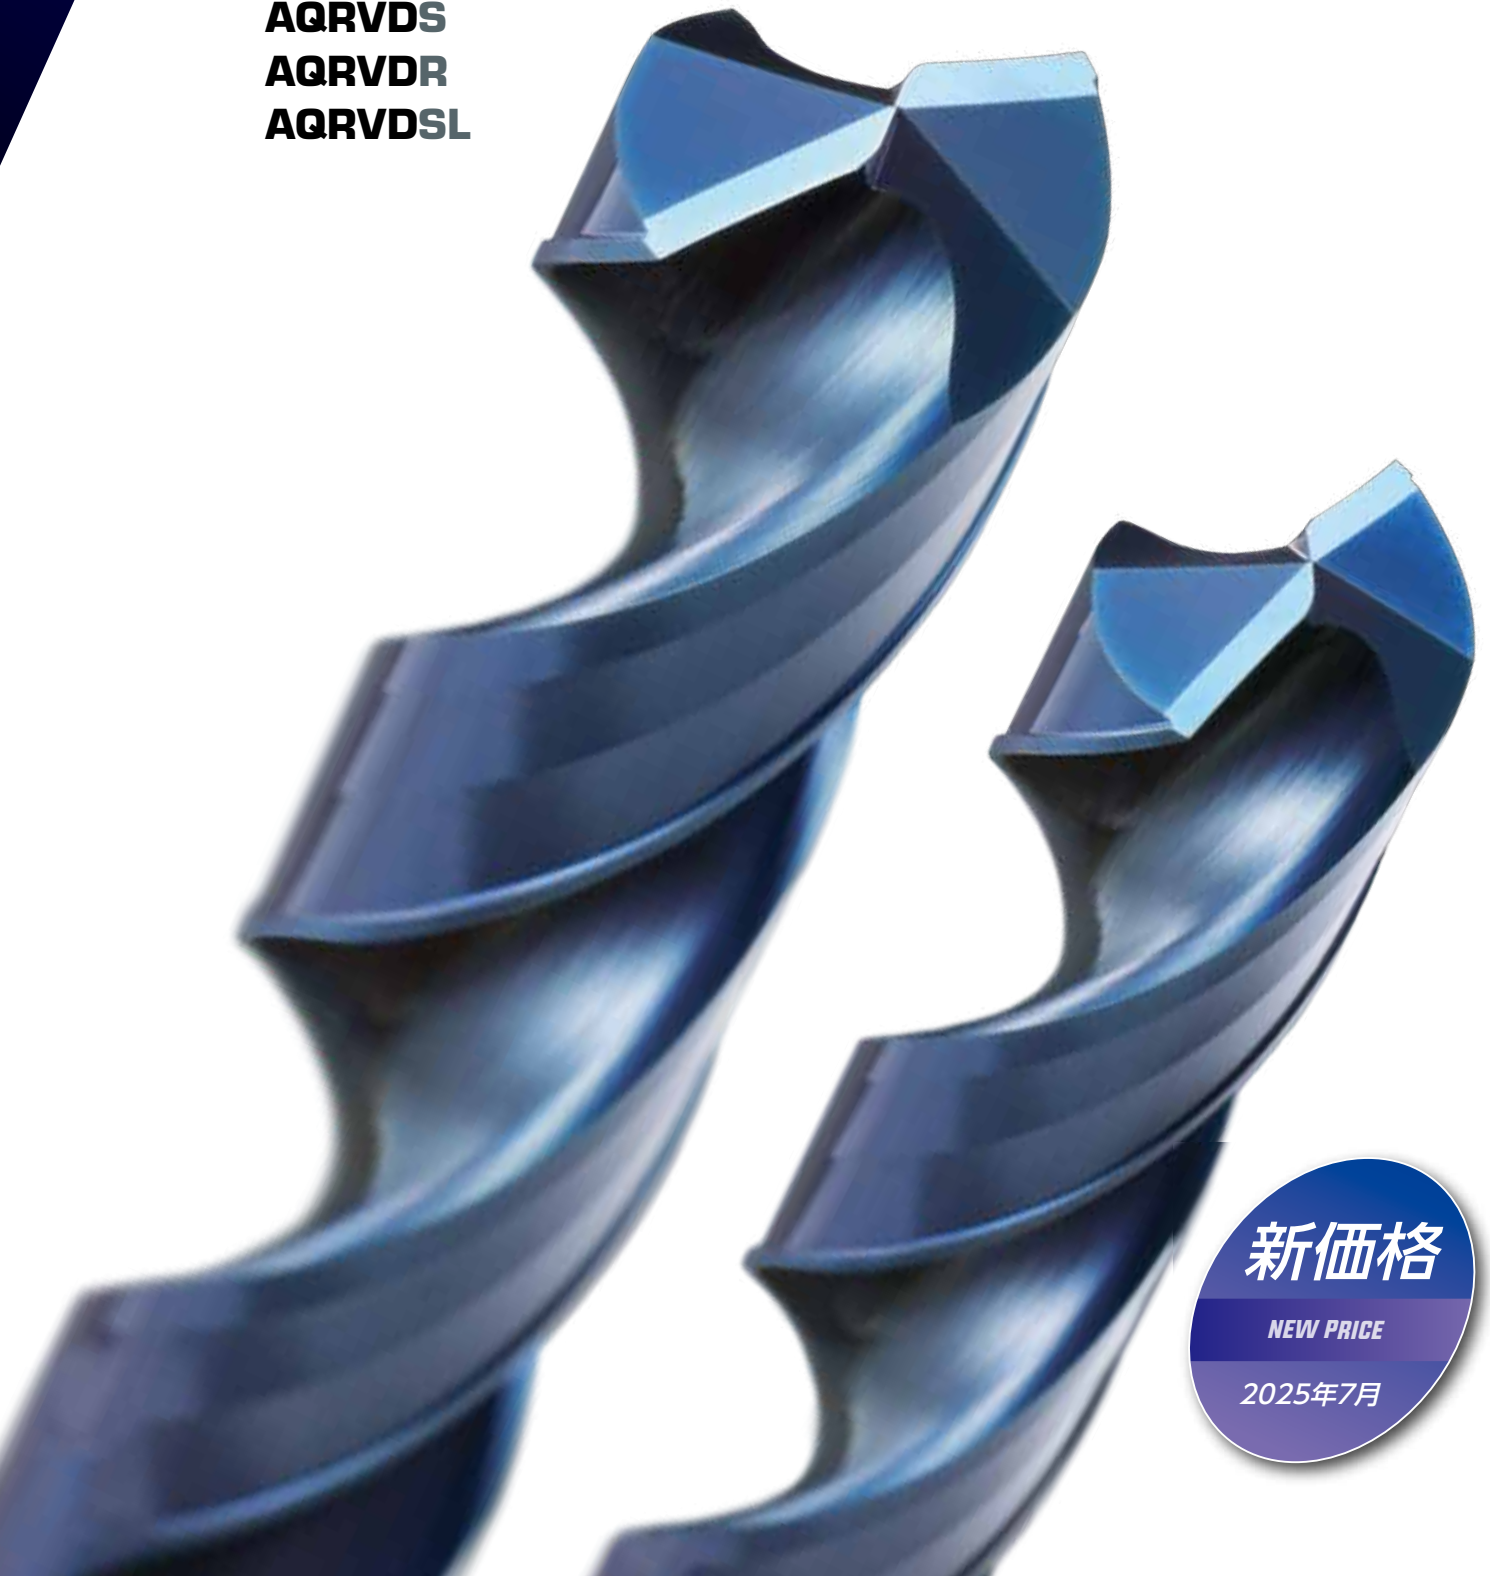

新価格

NEW PRICE

2025年7月

ものづくりの世界に革命を起こす

アクアREVOドリル

スタブ/レギュラ/セミロング

AQRVDS AQRVDR AQRVDSL

AquaREVO Drills Stub/Regular/Semi-long

全てが新次元、革命的性能を実現


Material, design, coating are completely all renewed, Dramatically improves all functions required for drilling



MOVIE LINK

硬さと靱性を両立した超硬母材を新開発 耐摩耗性と耐チッピング性を向上


- Development of carbide base material compatible with hardness and toughness
- Improving wear resistance and chipping resistance

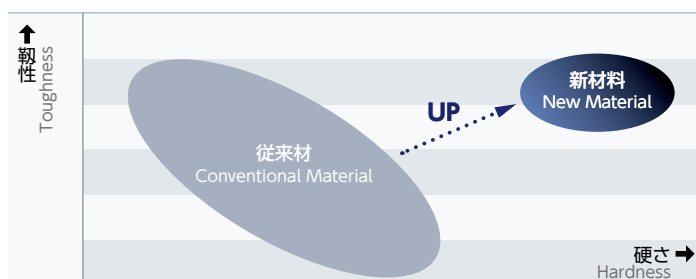

直線刃形 New Shape

直線刃形の採用により応力を分散 コーナーの欠損強度を向上

- Adoption of straight cutting edge. Break up cutting stress
- Improve strength against corner chipping

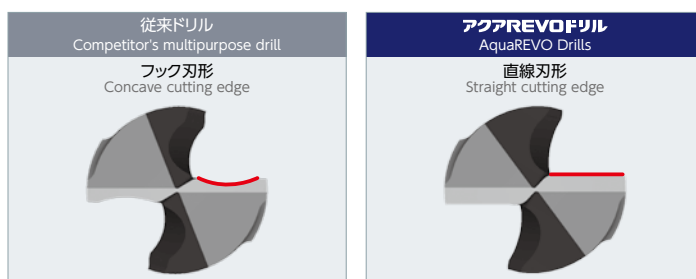

REVO-Dコート New Coating

耐酸化性と耐摩耗性に優れた REVO-Dコートを新開発 さらに超平滑化処理による スムーズな切りくず排出を実現

- Newly developed REVO-D coat suitable for drilling
- High oxidation resistance and wear resistance ensured
- Realizes low friction and smooth chip evacuation by super smooth surface treatment


超平滑化処理

Super smooth surface treatment

AlCrN系とAlTiN系被膜を
ナノレベルで積層したREVO-Dコート
AlCrN-based and AlTiN-based films are
stacked at the nano level

新開発高強度超硬母材

High strength cemented
carbide base material

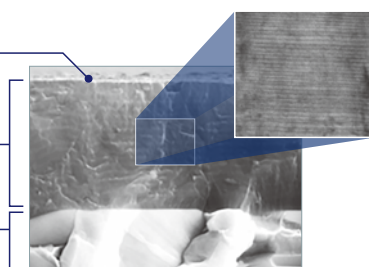

長寿命

Long tool life

他のドリルを圧倒する耐久性と安定性

Durability and stability to overwhelm other drills




高効率

High efficiency

回転数、送りを上げてても高性能、加工時間を大幅に短縮

High performance even with increased speed and feed, it is possible to largely shorten processing time

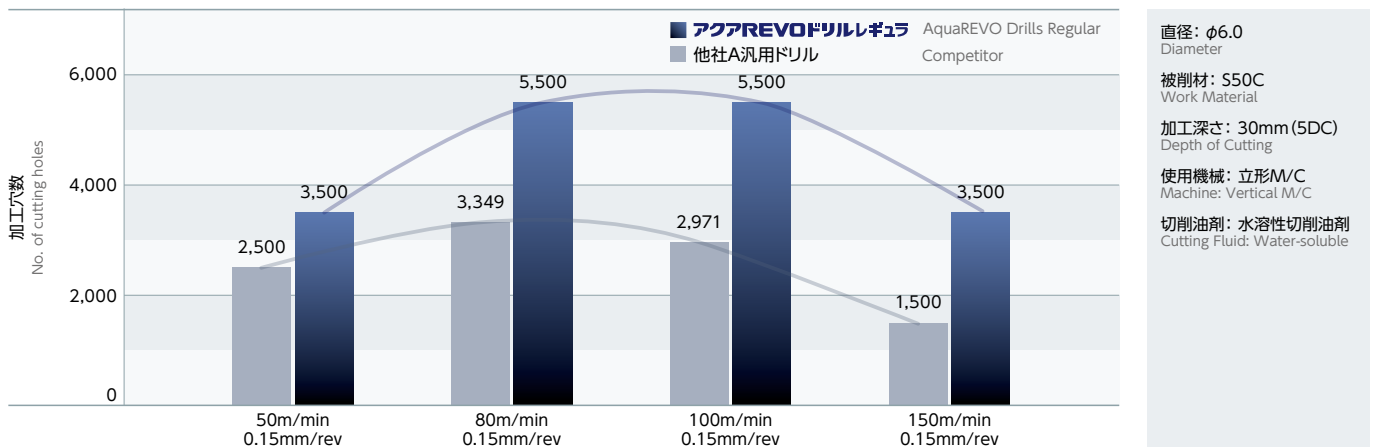

多用途

Multipurpose

高硬度材や難削材でも能率を落とさず、高品位加工


Even with high hardness materials and difficult-to-cut materials, high quality processing is available without lowering efficiency



AQRVDS

アクアREVOドリルスタブ

AquaREVO Drills Stub

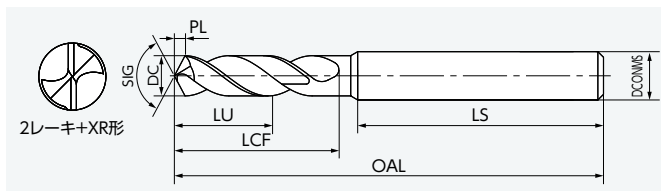

LIST 9860 オーダー方法 Order 商品記号 Code

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price(¥)
AQRVDS0200	2.0	6	9	34.1	45	3	0.4	●	6,870
AQRVDS0201	2.01	8	11	32.1	45	3	0.4	□	—
AQRVDS0202	2.02	8	11	32.2	45	3	0.4	□	—
AQRVDS0203	2.03	8	11	32.2	45	3	0.4	□	—
AQRVDS0204	2.04	7.9	11	32.2	45	3	0.4	□	—
AQRVDS0205	2.05	7.9	11	32.2	45	3	0.4	●	6,870
AQRVDS0206	2.06	7.9	11	32.2	45	3	0.4	□	—
AQRVDS0207	2.07	7.9	11	32.2	45	3	0.4	□	—
AQRVDS0208	2.08	7.9	11	32.2	45	3	0.4	□	—
AQRVDS0209	2.09	7.9	11	32.2	45	3	0.4	□	—
AQRVDS0210	2.1	7.9	11	32.2	45	3	0.4	●	6,870
AQRVDS0211	2.11	7.8	11	32.2	45	3	0.4	□	—
AQRVDS0212	2.12	7.8	11	32.2	45	3	0.4	□	—
AQRVDS0213	2.13	7.8	11	32.2	45	3	0.4	□	—
AQRVDS0214	2.14	7.8	11	32.3	45	3	0.4	□	—
AQRVDS0215	2.15	7.8	11	32.3	45	3	0.4	●	6,870
AQRVDS0216	2.16	7.8	11	32.3	45	3	0.4	□	—
AQRVDS0217	2.17	7.7	11	32.3	45	3	0.4	□	—
AQRVDS0218	2.18	7.7	11	32.3	45	3	0.5	□	—
AQRVDS0219	2.19	7.7	11	32.3	45	3	0.5	□	—
AQRVDS0220	2.2	7.7	11	32.3	45	3	0.5	●	6,870
AQRVDS0221	2.21	7.7	11	32.3	45	3	0.5	□	—
AQRVDS0222	2.22	7.7	11	32.3	45	3	0.5	□	—
AQRVDS0223	2.23	7.7	11	32.3	45	3	0.5	□	—
AQRVDS0224	2.24	7.6	11	32.3	45	3	0.5	□	—
AQRVDS0225	2.25	7.6	11	32.4	45	3	0.5	●	6,870
AQRVDS0226	2.26	7.6	11	32.4	45	3	0.5	□	—
AQRVDS0227	2.27	7.6	11	32.4	45	3	0.5	□	—
AQRVDS0228	2.28	7.6	11	32.4	45	3	0.5	●	6,870
AQRVDS0229	2.29	7.6	11	32.4	45	3	0.5	□	—
AQRVDS0230	2.3	7.6	11	32.4	45	3	0.5	●	6,870
AQRVDS0231	2.31	7.5	11	32.4	45	3	0.5	□	—
AQRVDS0232	2.32	7.5	11	32.4	45	3	0.5	□	—
AQRVDS0233	2.33	7.5	11	32.4	45	3	0.5	●	6,870
AQRVDS0234	2.34	7.5	11	32.4	45	3	0.5	□	—
AQRVDS0235	2.35	7.5	11	32.4	45	3	0.5	●	6,870
AQRVDS0236	2.36	7.5	11	32.4	45	3	0.5	□	—
AQRVDS0237	2.37	7.4	11	32.5	45	3	0.5	□	—
AQRVDS0238	2.38	7.4	11	32.5	45	3	0.5	□	—
AQRVDS0239	2.39	7.4	11	32.5	45	3	0.5	□	—
AQRVDS0240	2.4	7.4	11	32.5	45	3	0.5	●	6,870
AQRVDS0241	2.41	7.4	11	32.5	45	3	0.5	□	—
AQRVDS0242	2.42	7.4	11	32.5	45	3	0.5	□	—
AQRVDS0243	2.43	7.4	11	32.5	45	3	0.5	□	—
AQRVDS0244	2.44	7.3	11	32.5	45	3	0.5	□	—
AQRVDS0245	2.45	7.3	11	32.5	45	3	0.5	●	6,870
AQRVDS0246	2.46	7.3	11	32.5	45	3	0.5	□	—
AQRVDS0247	2.47	7.3	11	32.5	45	3	0.5	□	—
AQRVDS0248	2.48	7.3	11	32.5	45	3	0.5	□	—
AQRVDS0249	2.49	7.3	11	32.6	45	3	0.5	□	—
AQRVDS0250	2.5	7.3	11	32.6	45	3	0.5	●	6,870
AQRVDS0251	2.51	10.2	14	29.6	45	3	0.5	□	—
AQRVDS0252	2.52	10.2	14	29.6	45	3	0.5	□	—
AQRVDS0253	2.53	10.2	14	29.6	45	3	0.5	□	—
AQRVDS0254	2.54	10.2	14	29.6	45	3	0.5	□	—

単位 (Unit):mm

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price(¥)
AQRVDS0255	2.55	10.2	14	29.6	45	3	0.5	●	6,870
AQRVDS0256	2.56	10.2	14	29.6	45	3	0.5	□	—
AQRVDS0257	2.57	10.1	14	29.6	45	3	0.5	□	—
AQRVDS0258	2.58	10.1	14	29.6	45	3	0.5	□	—
AQRVDS0259	2.59	10.1	14	29.6	45	3	0.5	□	—
AQRVDS0260	2.6	10.1	14	29.7	45	3	0.5	●	6,870
AQRVDS0261	2.61	10.1	14	29.7	45	3	0.5	□	—
AQRVDS0262	2.62	10.1	14	29.7	45	3	0.5	□	—
AQRVDS0263	2.63	10.1	14	29.7	45	3	0.5	□	—
AQRVDS0264	2.64	10	14	29.7	45	3	0.5	□	—
AQRVDS0265	2.65	10	14	29.7	45	3	0.5	●	6,870
AQRVDS0266	2.66	10	14	29.7	45	3	0.6	□	—
AQRVDS0267	2.67	10	14	29.7	45	3	0.6	□	—
AQRVDS0268	2.68	10	14	29.7	45	3	0.6	□	—
AQRVDS0269	2.69	10	14	29.7	45	3	0.6	□	—
AQRVDS0270	2.7	10	14	29.7	45	3	0.6	●	6,870
AQRVDS0271	2.71	9.9	14	29.7	45	3	0.6	□	—
AQRVDS0272	2.72	9.9	14	29.8	45	3	0.6	□	—
AQRVDS0273	2.73	9.9	14	29.8	45	3	0.6	□	—
AQRVDS0274	2.74	9.9	14	29.8	45	3	0.6	□	—
AQRVDS0275	2.75	9.9	14	29.8	45	3	0.6	●	6,870
AQRVDS0276	2.76	9.9	14	29.8	45	3	0.6	●	6,870
AQRVDS0277	2.77	9.8	14	29.8	45	3	0.6	□	—
AQRVDS0278	2.78	9.8	14	29.8	45	3	0.6	●	6,870
AQRVDS0279	2.79	9.8	14	29.8	45	3	0.6	□	—
AQRVDS0280	2.8	9.8	14	29.8	45	3	0.6	●	6,870
AQRVDS0281	2.81	9.8	14	29.8	45	3	0.6	□	—
AQRVDS0282	2.82	9.8	14	29.8	45	3	0.6	□	—
AQRVDS0283	2.83	9.8	14	29.9	45	3	0.6	□	—
AQRVDS0284	2.84	9.7	14	29.9	45	3	0.6	□	—
AQRVDS0285	2.85	9.7	14	29.9	45	3	0.6	●	6,870
AQRVDS0286	2.86	9.7	14	29.9	45	3	0.6	□	—
AQRVDS0287	2.87	9.7	14	29.9	45	3	0.6	□	—
AQRVDS0288	2.88	9.7	14	29.9	45	3	0.6	□	—
AQRVDS0289	2.89	9.7	14	29.9	45	3	0.6	□	—
AQRVDS0290	2.9	9.7	14	29.9	45	3	0.6	●	6,870
AQRVDS0291	2.91	9.6	14	29.9	45	3	0.6	□	—
AQRVDS0292	2.92	9.6	14	29.9	45	3	0.6	□	—
AQRVDS0293	2.93	9.6	14	29.9	45	3	0.6	□	—
AQRVDS0294	2.94	9.6	14	29.9	45	3	0.6	□	—
AQRVDS0295	2.95	9.6	14	30	45	3	0.6	●	6,870
AQRVDS0296	2.96	9.6	14	30	45	3	0.6	□	—
AQRVDS0297	2.97	9.5	14	30	45	3	0.6	□	—
AQRVDS0298	2.98	9.5	14	30	45	3	0.6	□	—
AQRVDS0299	2.99	9.5	14	30	45	3	0.6	□	—
AQRVDS0300	3.0	9.5	14	30	45	3	0.6	●	6,870
AQRVDS0301	3.01	15.5	20	33.1	55	4	0.6	□	—
AQRVDS0302	3.02	15.5	20	33.2	55	4	0.6	□	—
AQRVDS0303	3.03	15.5	20	33.2	55	4	0.6	□	—
AQRVDS0304	3.04	15.4	20	33.2	55	4	0.6	□	—
AQRVDS0305	3.05	15.4	20	33.2	55	4	0.6	●	7,400
AQRVDS0306	3.06	15.4	20	33.2	55	4	0.6	□	—
AQRVDS0307	3.07	15.4	20	33.2	55	4	0.6	□	—
AQRVDS0308	3.08	15.4	20	33.2	55	4	0.6	□	—
AQRVDS0309	3.09	15.4	20	33.2	55	4	0.6	□	—

● 標準在庫品 □ 特定代理店在庫品 ※0.01mmサイズの直径許容差は0~-0.009mm

● Standard stock item □ Available for Japan customers only Tolerance of diameter is 0 to -0.009mm for 0.01mm size

単位 (Unit):mm

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDS0310	3.1	15.4	20	33.2	55	4	0.6	●	7,400
AQRVDS0311	3.11	15.3	20	33.2	55	4	0.6	□	—
AQRVDS0312	3.12	15.3	20	33.2	55	4	0.6	□	—
AQRVDS0313	3.13	15.3	20	33.2	55	4	0.6	□	—
AQRVDS0314	3.14	15.3	20	33.3	55	4	0.7	□	—
AQRVDS0315	3.15	15.3	20	33.3	55	4	0.7	●	7,400
AQRVDS0316	3.16	15.3	20	33.3	55	4	0.7	□	—
AQRVDS0317	3.17	15.2	20	33.3	55	4	0.7	□	—
AQRVDS0318	3.18	15.2	20	33.3	55	4	0.7	□	—
AQRVDS0319	3.19	15.2	20	33.3	55	4	0.7	□	—
AQRVDS0320	3.2	15.2	20	33.3	55	4	0.7	●	7,400
AQRVDS0321	3.21	15.2	20	33.3	55	4	0.7	□	—
AQRVDS0322	3.22	15.2	20	33.3	55	4	0.7	□	—
AQRVDS0323	3.23	15.2	20	33.3	55	4	0.7	□	—
AQRVDS0324	3.24	15.1	20	33.3	55	4	0.7	□	—
AQRVDS0325	3.25	15.1	20	33.4	55	4	0.7	●	7,400
AQRVDS0326	3.26	15.1	20	33.4	55	4	0.7	□	—
AQRVDS0327	3.27	15.1	20	33.4	55	4	0.7	□	—
AQRVDS0328	3.28	15.1	20	33.4	55	4	0.7	□	—
AQRVDS0329	3.29	15.1	20	33.4	55	4	0.7	□	—
AQRVDS0330	3.3	15.1	20	33.4	55	4	0.7	●	7,400
AQRVDS0331	3.31	15	20	33.4	55	4	0.7	□	—
AQRVDS0332	3.32	15	20	33.4	55	4	0.7	□	—
AQRVDS0333	3.33	15	20	33.4	55	4	0.7	□	—
AQRVDS0334	3.34	15	20	33.4	55	4	0.7	□	—
AQRVDS0335	3.35	15	20	33.4	55	4	0.7	●	7,400
AQRVDS0336	3.36	15	20	33.4	55	4	0.7	□	—
AQRVDS0337	3.37	14.9	20	33.5	55	4	0.7	□	—
AQRVDS0338	3.38	14.9	20	33.5	55	4	0.7	□	—
AQRVDS0339	3.39	14.9	20	33.5	55	4	0.7	□	—
AQRVDS0340	3.4	14.9	20	33.5	55	4	0.7	●	7,400
AQRVDS0341	3.41	14.9	20	33.5	55	4	0.7	□	—
AQRVDS0342	3.42	14.9	20	33.5	55	4	0.7	□	—
AQRVDS0343	3.43	14.9	20	33.5	55	4	0.7	□	—
AQRVDS0344	3.44	14.8	20	33.5	55	4	0.7	□	—
AQRVDS0345	3.45	14.8	20	33.5	55	4	0.7	●	7,400
AQRVDS0346	3.46	14.8	20	33.5	55	4	0.7	□	—
AQRVDS0347	3.47	14.8	20	33.5	55	4	0.7	□	—
AQRVDS0348	3.48	14.8	20	33.5	55	4	0.7	□	—
AQRVDS0349	3.49	14.8	20	33.6	55	4	0.7	□	—
AQRVDS0350	3.5	14.8	20	33.6	55	4	0.7	●	7,400
AQRVDS0351	3.51	16.7	22	31.6	55	4	0.7	□	—
AQRVDS0352	3.52	16.7	22	31.6	55	4	0.7	□	—
AQRVDS0353	3.53	16.7	22	31.6	55	4	0.7	□	—
AQRVDS0354	3.54	16.7	22	31.6	55	4	0.7	□	—
AQRVDS0355	3.55	16.7	22	31.6	55	4	0.7	●	7,800
AQRVDS0356	3.56	16.7	22	31.6	55	4	0.7	□	—
AQRVDS0357	3.57	16.6	22	31.6	55	4	0.7	□	—
AQRVDS0358	3.58	16.6	22	31.6	55	4	0.7	□	—
AQRVDS0359	3.59	16.6	22	31.6	55	4	0.7	□	—
AQRVDS0360	3.6	16.6	22	31.7	55	4	0.7	●	7,800
AQRVDS0361	3.61	16.6	22	31.7	55	4	0.7	□	—
AQRVDS0362	3.62	16.6	22	31.7	55	4	0.7	□	—
AQRVDS0363	3.63	16.6	22	31.7	55	4	0.8	□	—
AQRVDS0364	3.64	16.5	22	31.7	55	4	0.8	□	—

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDS0365	3.65	16.5	22	31.7	55	4	0.8	●	7,800
AQRVDS0366	3.66	16.5	22	31.7	55	4	0.8	●	7,800
AQRVDS0367	3.67	16.5	22	31.7	55	4	0.8	□	—
AQRVDS0368	3.68	16.5	22	31.7	55	4	0.8	●	7,800
AQRVDS0369	3.69	16.5	22	31.7	55	4	0.8	□	—
AQRVDS0370	3.7	16.5	22	31.7	55	4	0.8	●	7,800
AQRVDS0371	3.71	16.4	22	31.7	55	4	0.8	□	—
AQRVDS0372	3.72	16.4	22	31.8	55	4	0.8	□	—
AQRVDS0373	3.73	16.4	22	31.8	55	4	0.8	□	—
AQRVDS0374	3.74	16.4	22	31.8	55	4	0.8	□	—
AQRVDS0375	3.75	16.4	22	31.8	55	4	0.8	●	7,800
AQRVDS0376	3.76	16.4	22	31.8	55	4	0.8	□	—
AQRVDS0377	3.77	16.3	22	31.8	55	4	0.8	□	—
AQRVDS0378	3.78	16.3	22	31.8	55	4	0.8	□	—
AQRVDS0379	3.79	16.3	22	31.8	55	4	0.8	□	—
AQRVDS0380	3.8	16.3	22	31.8	55	4	0.8	●	7,800
AQRVDS0381	3.81	16.3	22	31.8	55	4	0.8	□	—
AQRVDS0382	3.82	16.3	22	31.8	55	4	0.8	□	—
AQRVDS0383	3.83	16.3	22	31.9	55	4	0.8	□	—
AQRVDS0384	3.84	16.2	22	31.9	55	4	0.8	□	—
AQRVDS0385	3.85	16.2	22	31.9	55	4	0.8	●	7,800
AQRVDS0386	3.86	16.2	22	31.9	55	4	0.8	□	—
AQRVDS0387	3.87	16.2	22	31.9	55	4	0.8	□	—
AQRVDS0388	3.88	16.2	22	31.9	55	4	0.8	□	—
AQRVDS0389	3.89	16.2	22	31.9	55	4	0.8	□	—
AQRVDS0390	3.9	16.2	22	31.9	55	4	0.8	●	7,800
AQRVDS0391	3.91	16.1	22	31.9	55	4	0.8	□	—
AQRVDS0392	3.92	16.1	22	31.9	55	4	0.8	□	—
AQRVDS0393	3.93	16.1	22	31.9	55	4	0.8	□	—
AQRVDS0394	3.94	16.1	22	31.9	55	4	0.8	□	—
AQRVDS0395	3.95	16.1	22	32	55	4	0.8	●	7,800
AQRVDS0396	3.96	16.1	22	32	55	4	0.8	□	—
AQRVDS0397	3.97	16	22	32	55	4	0.8	□	—
AQRVDS0398	3.98	16	22	32	55	4	0.8	□	—
AQRVDS0399	3.99	16	22	32	55	4	0.8	□	—
AQRVDS0400	4.0	16	22	32	55	4	0.8	●	7,800
AQRVDS0401	4.01	18	24	36.1	62	5	0.8	□	—
AQRVDS0402	4.02	18	24	36.2	62	5	0.8	□	—
AQRVDS0403	4.03	18	24	36.2	62	5	0.8	□	—
AQRVDS0404	4.04	17.9	24	36.2	62	5	0.8	□	—
AQRVDS0405	4.05	17.9	24	36.2	62	5	0.8	●	8,350
AQRVDS0406	4.06	17.9	24	36.2	62	5	0.8	□	—
AQRVDS0407	4.07	17.9	24	36.2	62	5	0.8	□	—
AQRVDS0408	4.08	17.9	24	36.2	62	5	0.8	□	—
AQRVDS0409	4.09	17.9	24	36.2	62	5	0.8	□	—
AQRVDS0410	4.1	17.9	24	36.2	62	5	0.8	●	8,350
AQRVDS0411	4.11	17.8	24	36.2	62	5	0.9	□	—
AQRVDS0412	4.12	17.8	24	36.2	62	5	0.9	□	—
AQRVDS0413	4.13	17.8	24	36.2	62	5	0.9	□	—
AQRVDS0414	4.14	17.8	24	36.3	62	5	0.9	□	—
AQRVDS0415	4.15	17.8	24	36.3	62	5	0.9	●	8,350
AQRVDS0416	4.16	17.8	24	36.3	62	5	0.9	□	—
AQRVDS0417	4.17	17.7	24	36.3	62	5	0.9	□	—
AQRVDS0418	4.18	17.7	24	36.3	62	5	0.9	□	—
AQRVDS0419	4.19	17.7	24	36.3	62	5	0.9	□	—

● 標準在庫品 □ 特定代理店在庫品 ※0.01mmサイズの直径許容差は0～-0.009mm
 ● Standard stock item □ Available for Japan customers only Tolerance of diameter is 0 to -0.009mm for 0.01mm size

AQRVDS

アクアREVOドリルスタブ

AquaREVO Drills Stub

単位 (Unit):mm

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDS0420	4.2	17.7	24	36.3	62	5	0.9	●	8,350
AQRVDS0421	4.21	17.7	24	36.3	62	5	0.9	□	—
AQRVDS0422	4.22	17.7	24	36.3	62	5	0.9	□	—
AQRVDS0423	4.23	17.7	24	36.3	62	5	0.9	□	—
AQRVDS0424	4.24	17.6	24	36.3	62	5	0.9	□	—
AQRVDS0425	4.25	17.6	24	36.4	62	5	0.9	●	8,350
AQRVDS0426	4.26	17.6	24	36.4	62	5	0.9	□	—
AQRVDS0427	4.27	17.6	24	36.4	62	5	0.9	□	—
AQRVDS0428	4.28	17.6	24	36.4	62	5	0.9	□	—
AQRVDS0429	4.29	17.6	24	36.4	62	5	0.9	□	—
AQRVDS0430	4.3	17.6	24	36.4	62	5	0.9	●	8,350
AQRVDS0431	4.31	17.5	24	36.4	62	5	0.9	□	—
AQRVDS0432	4.32	17.5	24	36.4	62	5	0.9	□	—
AQRVDS0433	4.33	17.5	24	36.4	62	5	0.9	□	—
AQRVDS0434	4.34	17.5	24	36.4	62	5	0.9	□	—
AQRVDS0435	4.35	17.5	24	36.4	62	5	0.9	●	8,350
AQRVDS0436	4.36	17.5	24	36.4	62	5	0.9	□	—
AQRVDS0437	4.37	17.4	24	36.5	62	5	0.9	□	—
AQRVDS0438	4.38	17.4	24	36.5	62	5	0.9	□	—
AQRVDS0439	4.39	17.4	24	36.5	62	5	0.9	□	—
AQRVDS0440	4.4	17.4	24	36.5	62	5	0.9	●	8,350
AQRVDS0441	4.41	17.4	24	36.5	62	5	0.9	□	—
AQRVDS0442	4.42	17.4	24	36.5	62	5	0.9	□	—
AQRVDS0443	4.43	17.4	24	36.5	62	5	0.9	□	—
AQRVDS0444	4.44	17.3	24	36.5	62	5	0.9	□	—
AQRVDS0445	4.45	17.3	24	36.5	62	5	0.9	●	8,350
AQRVDS0446	4.46	17.3	24	36.5	62	5	0.9	□	—
AQRVDS0447	4.47	17.3	24	36.5	62	5	0.9	□	—
AQRVDS0448	4.48	17.3	24	36.5	62	5	0.9	□	—
AQRVDS0449	4.49	17.3	24	36.6	62	5	0.9	□	—
AQRVDS0450	4.5	17.3	24	36.6	62	5	0.9	●	8,350
AQRVDS0451	4.51	19.2	26	34.6	62	5	0.9	□	—
AQRVDS0452	4.52	19.2	26	34.6	62	5	0.9	□	—
AQRVDS0453	4.53	19.2	26	34.6	62	5	0.9	□	—
AQRVDS0454	4.54	19.2	26	34.6	62	5	0.9	□	—
AQRVDS0455	4.55	19.2	26	34.6	62	5	0.9	●	8,910
AQRVDS0456	4.56	19.2	26	34.6	62	5	0.9	□	—
AQRVDS0457	4.57	19.1	26	34.6	62	5	0.9	□	—
AQRVDS0458	4.58	19.1	26	34.6	62	5	0.9	□	—
AQRVDS0459	4.59	19.1	26	34.6	62	5	1	□	—
AQRVDS0460	4.6	19.1	26	34.7	62	5	1	●	8,910
AQRVDS0461	4.61	19.1	26	34.7	62	5	1	□	—
AQRVDS0462	4.62	19.1	26	34.7	62	5	1	●	8,910
AQRVDS0463	4.63	19.1	26	34.7	62	5	1	□	—
AQRVDS0464	4.64	19	26	34.7	62	5	1	●	8,910
AQRVDS0465	4.65	19	26	34.7	62	5	1	●	8,910
AQRVDS0466	4.66	19	26	34.7	62	5	1	□	—
AQRVDS0467	4.67	19	26	34.7	62	5	1	□	—
AQRVDS0468	4.68	19	26	34.7	62	5	1	□	—
AQRVDS0469	4.69	19	26	34.7	62	5	1	□	—
AQRVDS0470	4.7	19	26	34.7	62	5	1	●	8,910
AQRVDS0471	4.71	18.9	26	34.7	62	5	1	□	—
AQRVDS0472	4.72	18.9	26	34.8	62	5	1	□	—
AQRVDS0473	4.73	18.9	26	34.8	62	5	1	□	—
AQRVDS0474	4.74	18.9	26	34.8	62	5	1	□	—

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDS0475	4.75	18.9	26	34.8	62	5	1	●	8,910
AQRVDS0476	4.76	18.9	26	34.8	62	5	1	□	—
AQRVDS0477	4.77	18.8	26	34.8	62	5	1	□	—
AQRVDS0478	4.78	18.8	26	34.8	62	5	1	□	—
AQRVDS0479	4.79	18.8	26	34.8	62	5	1	□	—
AQRVDS0480	4.8	18.8	26	34.8	62	5	1	●	8,910
AQRVDS0481	4.81	18.8	26	34.8	62	5	1	□	—
AQRVDS0482	4.82	18.8	26	34.8	62	5	1	□	—
AQRVDS0483	4.83	18.8	26	34.9	62	5	1	□	—
AQRVDS0484	4.84	18.7	26	34.9	62	5	1	□	—
AQRVDS0485	4.85	18.7	26	34.9	62	5	1	●	8,910
AQRVDS0486	4.86	18.7	26	34.9	62	5	1	□	—
AQRVDS0487	4.87	18.7	26	34.9	62	5	1	□	—
AQRVDS0488	4.88	18.7	26	34.9	62	5	1	□	—
AQRVDS0489	4.89	18.7	26	34.9	62	5	1	□	—
AQRVDS0490	4.9	18.7	26	34.9	62	5	1	●	8,910
AQRVDS0491	4.91	18.6	26	34.9	62	5	1	□	—
AQRVDS0492	4.92	18.6	26	34.9	62	5	1	□	—
AQRVDS0493	4.93	18.6	26	34.9	62	5	1	□	—
AQRVDS0494	4.94	18.6	26	34.9	62	5	1	□	—
AQRVDS0495	4.95	18.6	26	35	62	5	1	●	8,910
AQRVDS0496	4.96	18.6	26	35	62	5	1	□	—
AQRVDS0497	4.97	18.5	26	35	62	5	1	□	—
AQRVDS0498	4.98	18.5	26	35	62	5	1	□	—
AQRVDS0499	4.99	18.5	26	35	62	5	1	□	—
AQRVDS0500	5.0	18.5	26	35	62	5	1	●	8,910
AQRVDS0501	5.01	18.5	26	38.1	66	6	1	□	—
AQRVDS0502	5.02	18.5	26	38.2	66	6	1	□	—
AQRVDS0503	5.03	18.5	26	38.2	66	6	1	□	—
AQRVDS0504	5.04	18.4	26	38.2	66	6	1	□	—
AQRVDS0505	5.05	18.4	26	38.2	66	6	1	●	9,440
AQRVDS0506	5.06	18.4	26	38.2	66	6	1	□	—
AQRVDS0507	5.07	18.4	26	38.2	66	6	1.1	□	—
AQRVDS0508	5.08	18.4	26	38.2	66	6	1.1	□	—
AQRVDS0509	5.09	18.4	26	38.2	66	6	1.1	□	—
AQRVDS0510	5.1	18.4	26	38.2	66	6	1.1	●	9,440
AQRVDS0511	5.11	18.3	26	38.2	66	6	1.1	□	—
AQRVDS0512	5.12	18.3	26	38.2	66	6	1.1	□	—
AQRVDS0513	5.13	18.3	26	38.2	66	6	1.1	□	—
AQRVDS0514	5.14	18.3	26	38.3	66	6	1.1	□	—
AQRVDS0515	5.15	18.3	26	38.3	66	6	1.1	●	9,440
AQRVDS0516	5.16	18.3	26	38.3	66	6	1.1	□	—
AQRVDS0517	5.17	18.2	26	38.3	66	6	1.1	□	—
AQRVDS0518	5.18	18.2	26	38.3	66	6	1.1	□	—
AQRVDS0519	5.19	18.2	26	38.3	66	6	1.1	□	—
AQRVDS0520	5.2	18.2	26	38.3	66	6	1.1	●	9,440
AQRVDS0521	5.21	18.2	26	38.3	66	6	1.1	□	—
AQRVDS0522	5.22	18.2	26	38.3	66	6	1.1	□	—
AQRVDS0523	5.23	18.2	26	38.3	66	6	1.1	□	—
AQRVDS0524	5.24	18.1	26	38.3	66	6	1.1	□	—
AQRVDS0525	5.25	18.1	26	38.4	66	6	1.1	●	9,440
AQRVDS0526	5.26	18.1	26	38.4	66	6	1.1	□	—
AQRVDS0527	5.27	18.1	26	38.4	66	6	1.1	□	—
AQRVDS0528	5.28	18.1	26	38.4	66	6	1.1	□	—
AQRVDS0529	5.29	18.1	26	38.4	66	6	1.1	□	—

● 標準在庫品 □ 特定代理店在庫品 ※0.01mmサイズの直径許容差は0～-0.009mm

● Standard stock item □ Available for Japan customers only Tolerance of diameter is 0 to -0.009mm for 0.01mm size

単位 (Unit):mm

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDS0530	5.3	18.1	26	38.4	66	6	1.1	●	9,440
AQRVDS0531	5.31	18	26	38.4	66	6	1.1	□	—
AQRVDS0532	5.32	18	26	38.4	66	6	1.1	□	—
AQRVDS0533	5.33	18	26	38.4	66	6	1.1	□	—
AQRVDS0534	5.34	18	26	38.4	66	6	1.1	□	—
AQRVDS0535	5.35	18	26	38.4	66	6	1.1	●	9,440
AQRVDS0536	5.36	18	26	38.4	66	6	1.1	□	—
AQRVDS0537	5.37	17.9	26	38.5	66	6	1.1	□	—
AQRVDS0538	5.38	17.9	26	38.5	66	6	1.1	□	—
AQRVDS0539	5.39	17.9	26	38.5	66	6	1.1	□	—
AQRVDS0540	5.4	17.9	26	38.5	66	6	1.1	●	9,440
AQRVDS0541	5.41	17.9	26	38.5	66	6	1.1	□	—
AQRVDS0542	5.42	17.9	26	38.5	66	6	1.1	□	—
AQRVDS0543	5.43	17.9	26	38.5	66	6	1.1	□	—
AQRVDS0544	5.44	17.8	26	38.5	66	6	1.1	□	—
AQRVDS0545	5.45	17.8	26	38.5	66	6	1.1	●	9,440
AQRVDS0546	5.46	17.8	26	38.5	66	6	1.1	□	—
AQRVDS0547	5.47	17.8	26	38.5	66	6	1.1	□	—
AQRVDS0548	5.48	17.8	26	38.5	66	6	1.1	□	—
AQRVDS0549	5.49	17.8	26	38.6	66	6	1.1	□	—
AQRVDS0550	5.5	17.8	26	38.6	66	6	1.1	●	9,440
AQRVDS0551	5.51	19.7	28	36.6	66	6	1.1	□	—
AQRVDS0552	5.52	19.7	28	36.6	66	6	1.1	●	9,870
AQRVDS0553	5.53	19.7	28	36.6	66	6	1.1	□	—
AQRVDS0554	5.54	19.7	28	36.6	66	6	1.1	●	9,870
AQRVDS0555	5.55	19.7	28	36.6	66	6	1.1	●	9,870
AQRVDS0556	5.56	19.7	28	36.6	66	6	1.2	□	—
AQRVDS0557	5.57	19.6	28	36.6	66	6	1.2	●	9,870
AQRVDS0558	5.58	19.6	28	36.6	66	6	1.2	□	—
AQRVDS0559	5.59	19.6	28	36.6	66	6	1.2	□	—
AQRVDS0560	5.6	19.6	28	36.7	66	6	1.2	●	9,870
AQRVDS0561	5.61	19.6	28	36.7	66	6	1.2	□	—
AQRVDS0562	5.62	19.6	28	36.7	66	6	1.2	□	—
AQRVDS0563	5.63	19.6	28	36.7	66	6	1.2	□	—
AQRVDS0564	5.64	19.5	28	36.7	66	6	1.2	□	—
AQRVDS0565	5.65	19.5	28	36.7	66	6	1.2	●	9,870
AQRVDS0566	5.66	19.5	28	36.7	66	6	1.2	□	—
AQRVDS0567	5.67	19.5	28	36.7	66	6	1.2	□	—
AQRVDS0568	5.68	19.5	28	36.7	66	6	1.2	□	—
AQRVDS0569	5.69	19.5	28	36.7	66	6	1.2	□	—
AQRVDS0570	5.7	19.5	28	36.7	66	6	1.2	●	9,870
AQRVDS0571	5.71	19.4	28	36.7	66	6	1.2	□	—
AQRVDS0572	5.72	19.4	28	36.8	66	6	1.2	□	—
AQRVDS0573	5.73	19.4	28	36.8	66	6	1.2	□	—
AQRVDS0574	5.74	19.4	28	36.8	66	6	1.2	□	—
AQRVDS0575	5.75	19.4	28	36.8	66	6	1.2	●	9,870
AQRVDS0576	5.76	19.4	28	36.8	66	6	1.2	□	—
AQRVDS0577	5.77	19.3	28	36.8	66	6	1.2	□	—
AQRVDS0578	5.78	19.3	28	36.8	66	6	1.2	□	—
AQRVDS0579	5.79	19.3	28	36.8	66	6	1.2	□	—
AQRVDS0580	5.8	19.3	28	36.8	66	6	1.2	●	9,870
AQRVDS0581	5.81	19.3	28	36.8	66	6	1.2	□	—
AQRVDS0582	5.82	19.3	28	36.8	66	6	1.2	□	—
AQRVDS0583	5.83	19.3	28	36.9	66	6	1.2	□	—
AQRVDS0584	5.84	19.2	28	36.9	66	6	1.2	□	—

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDS0585	5.85	19.2	28	36.9	66	6	1.2	●	9,870
AQRVDS0586	5.86	19.2	28	36.9	66	6	1.2	□	—
AQRVDS0587	5.87	19.2	28	36.9	66	6	1.2	□	—
AQRVDS0588	5.88	19.2	28	36.9	66	6	1.2	□	—
AQRVDS0589	5.89	19.2	28	36.9	66	6	1.2	□	—
AQRVDS0590	5.9	19.2	28	36.9	66	6	1.2	●	9,870
AQRVDS0591	5.91	19.1	28	36.9	66	6	1.2	□	—
AQRVDS0592	5.92	19.1	28	36.9	66	6	1.2	□	—
AQRVDS0593	5.93	19.1	28	36.9	66	6	1.2	□	—
AQRVDS0594	5.94	19.1	28	36.9	66	6	1.2	□	—
AQRVDS0595	5.95	19.1	28	37	66	6	1.2	●	9,870
AQRVDS0596	5.96	19.1	28	37	66	6	1.2	□	—
AQRVDS0597	5.97	19	28	37	66	6	1.2	□	—
AQRVDS0598	5.98	19	28	37	66	6	1.2	□	—
AQRVDS0599	5.99	19	28	37	66	6	1.2	□	—
AQRVDS0600	6.0	19	28	37	66	6	1.2	●	9,870
AQRVDS0601	6.01	23	32	40.1	74	7	1.2	□	—
AQRVDS0602	6.02	23	32	40.2	74	7	1.2	□	—
AQRVDS0603	6.03	23	32	40.2	74	7	1.2	□	—
AQRVDS0605	6.05	22.9	32	40.2	74	7	1.3	□	—
AQRVDS0610	6.1	22.9	32	40.2	74	7	1.3	●	9,870
AQRVDS0620	6.2	22.7	32	40.3	74	7	1.3	●	9,870
AQRVDS0630	6.3	22.6	32	40.4	74	7	1.3	●	9,870
AQRVDS0640	6.4	22.4	32	40.5	74	7	1.3	●	9,870
AQRVDS0650	6.5	22.3	32	40.6	74	7	1.3	●	9,870
AQRVDS0660	6.6	25.1	35	37.7	74	7	1.4	●	10,500
AQRVDS0670	6.7	25	35	37.7	74	7	1.4	●	10,500
AQRVDS0680	6.8	24.8	35	37.8	74	7	1.4	●	10,500
AQRVDS0690	6.9	24.7	35	37.9	74	7	1.4	●	10,500
AQRVDS0698	6.98	24.5	35	38	74	7	1.4	□	—
AQRVDS0699	6.99	24.5	35	38	74	7	1.4	□	—
AQRVDS0700	7.0	24.5	35	38	74	7	1.4	●	10,500
AQRVDS0701	7.01	24.5	35	42.1	79	8	1.5	□	—
AQRVDS0702	7.02	24.5	35	42.2	79	8	1.5	□	—
AQRVDS0703	7.03	24.5	35	42.2	79	8	1.5	□	—
AQRVDS0705	7.05	24.4	35	42.2	79	8	1.5	□	—
AQRVDS0710	7.1	24.4	35	42.2	79	8	1.5	●	11,100
AQRVDS0720	7.2	24.2	35	42.3	79	8	1.5	●	11,100
AQRVDS0730	7.3	24.1	35	42.4	79	8	1.5	●	11,100
AQRVDS0740	7.4	23.9	35	42.5	79	8	1.5	●	11,100
AQRVDS0750	7.5	23.8	35	42.6	79	8	1.6	●	11,100
AQRVDS0760	7.6	26.6	38	39.7	79	8	1.6	●	11,700
AQRVDS0770	7.7	26.5	38	39.7	79	8	1.6	●	11,700
AQRVDS0780	7.8	26.3	38	39.8	79	8	1.6	●	11,700
AQRVDS0790	7.9	26.2	38	39.9	79	8	1.6	●	11,700
AQRVDS0798	7.98	26	38	40	79	8	1.7	□	—
AQRVDS0799	7.99	26	38	40	79	8	1.7	□	—
AQRVDS0800	8.0	26	38	40	79	8	1.7	●	11,700
AQRVDS0801	8.01	26	38	43.1	83	9	1.7	□	—
AQRVDS0802	8.02	26	38	43.2	83	9	1.7	□	—
AQRVDS0803	8.03	26	38	43.2	83	9	1.7	□	—
AQRVDS0805	8.05	25.9	38	43.2	83	9	1.7	□	—
AQRVDS0810	8.1	25.9	38	43.2	83	9	1.7	●	12,400
AQRVDS0820	8.2	25.7	38	43.3	83	9	1.7	●	12,400
AQRVDS0830	8.3	25.6	38	43.4	83	9	1.7	●	12,400

● 標準在庫品 □ 特定代理店在庫品 ※0.01mmサイズの直径許容差は0～-0.009mm
 ● Standard stock item □ Available for Japan customers only Tolerance of diameter is 0 to -0.009mm for 0.01mm size

AQRVDS

アクアREVOドリルスタブ
AquaREVO Drills Stub

単位 (Unit):mm

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDS0840	8.4	25.4	38	43.5	83	9	1.7	●	12,400
AQRVDS0850	8.5	25.3	38	43.6	83	9	1.8	●	12,400
AQRVDS0860	8.6	27.1	40	41.7	83	9	1.8	●	13,000
AQRVDS0870	8.7	27	40	41.7	83	9	1.8	●	13,000
AQRVDS0880	8.8	26.8	40	41.8	83	9	1.8	●	13,000
AQRVDS0890	8.9	26.7	40	41.9	83	9	1.8	●	13,000
AQRVDS0898	8.98	26.5	40	42	83	9	1.9	□	—
AQRVDS0899	8.99	26.5	40	42	83	9	1.9	□	—
AQRVDS0900	9.0	26.5	40	42	83	9	1.9	●	13,000
AQRVDS0901	9.01	26.5	40	47.1	89	10	1.9	□	—
AQRVDS0902	9.02	26.5	40	47.2	89	10	1.9	□	—
AQRVDS0903	9.03	26.5	40	47.2	89	10	1.9	□	—
AQRVDS0905	9.05	26.4	40	47.2	89	10	1.9	□	—
AQRVDS0910	9.1	26.4	40	47.2	89	10	1.9	●	13,700
AQRVDS0920	9.2	26.2	40	47.3	89	10	1.9	●	13,700
AQRVDS0930	9.3	26.1	40	47.4	89	10	1.9	●	13,700
AQRVDS0940	9.4	25.9	40	47.5	89	10	1.9	●	13,700
AQRVDS0950	9.5	25.8	40	47.6	89	10	2	●	13,700
AQRVDS0960	9.6	28.6	43	44.7	89	10	2	●	14,400
AQRVDS0970	9.7	28.5	43	44.7	89	10	2	●	14,400
AQRVDS0980	9.8	28.3	43	44.8	89	10	2	●	14,400
AQRVDS0990	9.9	28.2	43	44.9	89	10	2.1	●	14,400
AQRVDS0998	9.98	28	43	45	89	10	2.1	□	—
AQRVDS0999	9.99	28	43	45	89	10	2.1	□	—
AQRVDS1000	10.0	28	43	45	89	10	2.1	●	14,400
AQRVDS1001	10.01	28	43	50.1	95	11	2.1	□	—
AQRVDS1002	10.02	28	43	50.2	95	11	2.1	□	—
AQRVDS1003	10.03	28	43	50.2	95	11	2.1	□	—
AQRVDS1005	10.05	27.9	43	50.2	95	11	2.1	□	—
AQRVDS1010	10.1	27.9	43	50.2	95	11	2.1	●	14,900
AQRVDS1020	10.2	27.7	43	50.3	95	11	2.1	●	14,900
AQRVDS1030	10.3	27.6	43	50.4	95	11	2.1	●	14,900
AQRVDS1040	10.4	27.4	43	50.5	95	11	2.2	●	14,900
AQRVDS1050	10.5	27.3	43	50.6	95	11	2.2	●	14,900
AQRVDS1060	10.6	31.1	47	46.7	95	11	2.2	●	15,500
AQRVDS1070	10.7	31	47	46.7	95	11	2.2	●	15,500
AQRVDS1080	10.8	30.8	47	46.8	95	11	2.2	●	15,500
AQRVDS1090	10.9	30.7	47	46.9	95	11	2.3	●	15,500
AQRVDS1098	10.98	30.5	47	47	95	11	2.3	□	—
AQRVDS1099	10.99	30.5	47	47	95	11	2.3	□	—
AQRVDS1100	11.0	30.5	47	47	95	11	2.3	●	15,500
AQRVDS1101	11.01	30.5	47	53.1	102	12	2.3	□	—
AQRVDS1102	11.02	30.5	47	53.2	102	12	2.3	□	—
AQRVDS1103	11.03	30.5	47	53.2	102	12	2.3	□	—
AQRVDS1105	11.05	30.4	47	53.2	102	12	2.3	□	—
AQRVDS1110	11.1	30.4	47	53.2	102	12	2.3	●	16,100
AQRVDS1120	11.2	30.2	47	53.3	102	12	2.3	●	16,100
AQRVDS1130	11.3	30.1	47	53.4	102	12	2.3	●	16,100
AQRVDS1140	11.4	29.9	47	53.5	102	12	2.4	●	16,100
AQRVDS1150	11.5	29.8	47	53.6	102	12	2.4	●	16,100
AQRVDS1160	11.6	32.6	50	50.7	102	12	2.4	●	16,700
AQRVDS1170	11.7	32.5	50	50.7	102	12	2.4	●	16,700
AQRVDS1180	11.8	32.3	50	50.8	102	12	2.4	●	16,700
AQRVDS1190	11.9	32.2	50	50.9	102	12	2.5	●	16,700
AQRVDS1198	11.98	32	50	51	102	12	2.5	□	—

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDS1199	11.99	32	50	51	102	12	2.5	□	—
AQRVDS1200	12.0	32	50	51	102	12	2.5	●	16,700
AQRVDS1201	12.01	32	50	50.1	102	13	2.5	□	—
AQRVDS1202	12.02	32	50	50.2	102	13	2.5	□	—
AQRVDS1203	12.03	32	50	50.2	102	13	2.5	□	—
AQRVDS1205	12.05	31.9	50	50.2	102	13	2.5	□	—
AQRVDS1210	12.1	31.9	50	50.2	102	13	2.5	●	17,200
AQRVDS1220	12.2	31.7	50	50.3	102	13	2.5	●	17,200
AQRVDS1230	12.3	31.6	50	50.4	102	13	2.5	●	17,200
AQRVDS1240	12.4	31.4	50	50.5	102	13	2.6	●	17,200
AQRVDS1250	12.5	31.3	50	50.6	102	13	2.6	●	17,200
AQRVDS1260	12.6	33.1	52	48.7	102	13	2.6	●	18,000
AQRVDS1270	12.7	33	52	48.7	102	13	2.6	●	18,000
AQRVDS1280	12.8	32.8	52	48.8	102	13	2.7	●	18,000
AQRVDS1290	12.9	32.7	52	48.9	102	13	2.7	●	18,000
AQRVDS1300	13.0	32.5	52	49	102	13	2.7	●	18,000
AQRVDS1310	13.1	33.4	53	52.2	107	14	2.7	●	18,500
AQRVDS1320	13.2	33.2	53	52.3	107	14	2.7	●	18,500
AQRVDS1330	13.3	33.1	53	52.4	107	14	2.8	●	18,500
AQRVDS1340	13.4	32.9	53	52.5	107	14	2.8	●	18,500
AQRVDS1350	13.5	32.8	53	52.6	107	14	2.8	●	18,500
AQRVDS1360	13.6	34.6	55	50.7	107	14	2.8	●	19,200
AQRVDS1370	13.7	34.5	55	50.7	107	14	2.8	●	19,200
AQRVDS1380	13.8	34.3	55	50.8	107	14	2.9	●	19,200
AQRVDS1390	13.9	34.2	55	50.9	107	14	2.9	●	19,200
AQRVDS1400	14.0	34	55	51	107	14	2.9	●	19,200
AQRVDS1410	14.1	33.9	55	53.2	110	15	2.9	●	19,700
AQRVDS1420	14.2	33.7	55	53.3	110	15	2.9	●	19,700
AQRVDS1430	14.3	33.6	55	53.4	110	15	3	●	19,700
AQRVDS1440	14.4	33.4	55	53.5	110	15	3	●	19,700
AQRVDS1450	14.5	33.3	55	53.6	110	15	3	●	19,700
AQRVDS1460	14.6	34.1	56	52.7	110	15	3	●	20,400
AQRVDS1470	14.7	34	56	52.7	110	15	3	●	20,400
AQRVDS1480	14.8	33.8	56	52.8	110	15	3.1	●	20,400
AQRVDS1490	14.9	33.7	56	52.9	110	15	3.1	●	20,400
AQRVDS1500	15.0	33.5	56	53	110	15	3.1	●	20,400
AQRVDS1510	15.1	33.4	56	56.2	114	16	3.1	●	21,100
AQRVDS1520	15.2	33.2	56	56.3	114	16	3.1	●	21,100
AQRVDS1530	15.3	33.1	56	56.4	114	16	3.2	●	21,100
AQRVDS1540	15.4	32.9	56	56.5	114	16	3.2	●	21,100
AQRVDS1550	15.5	32.8	56	56.6	114	16	3.2	●	21,100
AQRVDS1560	15.6	34.6	58	54.7	114	16	3.2	●	21,600
AQRVDS1570	15.7	34.5	58	54.7	114	16	3.3	●	21,600
AQRVDS1580	15.8	34.3	58	54.8	114	16	3.3	●	21,600
AQRVDS1590	15.9	34.2	58	54.9	114	16	3.3	●	21,600
AQRVDS1600	16.0	34	58	55	114	16	3.3	●	21,600

● 標準在庫品 □ 特定代理店在庫品

※0.01mmサイズの直径許容差は0～-0.009mm


● Standard stock item □ Available for Japan customers only

Tolerance of diameter is 0 to -0.009mm for 0.01mm size

AQRVDR

アクアREVOドリルレギュラ

AquaREVO Drills Regular

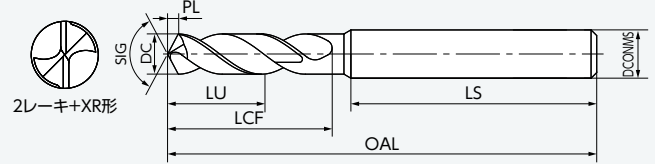

LIST 9862 オーダ方法 Order 商品記号 Code

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price(¥)
AQRVDR0200	2.0	12	15	32.1	49	3	0.4	●	8,120
AQRVDR0201	2.01	15	18	29.1	49	3	0.4	□	—
AQRVDR0202	2.02	15	18	29.2	49	3	0.4	□	—
AQRVDR0203	2.03	15	18	29.2	49	3	0.4	□	—
AQRVDR0204	2.04	14.9	18	29.2	49	3	0.4	□	—
AQRVDR0205	2.05	14.9	18	29.2	49	3	0.4	●	8,120
AQRVDR0206	2.06	14.9	18	29.2	49	3	0.4	□	—
AQRVDR0207	2.07	14.9	18	29.2	49	3	0.4	□	—
AQRVDR0208	2.08	14.9	18	29.2	49	3	0.4	□	—
AQRVDR0209	2.09	14.9	18	29.2	49	3	0.4	□	—
AQRVDR0210	2.1	14.9	18	29.2	49	3	0.4	●	8,120
AQRVDR0211	2.11	14.8	18	29.2	49	3	0.4	□	—
AQRVDR0212	2.12	14.8	18	29.2	49	3	0.4	□	—
AQRVDR0213	2.13	14.8	18	29.2	49	3	0.4	□	—
AQRVDR0214	2.14	14.8	18	29.3	49	3	0.4	□	—
AQRVDR0215	2.15	14.8	18	29.3	49	3	0.4	●	8,120
AQRVDR0216	2.16	14.8	18	29.3	49	3	0.4	□	—
AQRVDR0217	2.17	14.7	18	29.3	49	3	0.4	□	—
AQRVDR0218	2.18	14.7	18	29.3	49	3	0.5	□	—
AQRVDR0219	2.19	14.7	18	29.3	49	3	0.5	□	—
AQRVDR0220	2.2	14.7	18	29.3	49	3	0.5	●	8,120
AQRVDR0221	2.21	14.7	18	29.3	49	3	0.5	□	—
AQRVDR0222	2.22	14.7	18	29.3	49	3	0.5	□	—
AQRVDR0223	2.23	14.7	18	29.3	49	3	0.5	□	—
AQRVDR0224	2.24	14.6	18	29.3	49	3	0.5	□	—
AQRVDR0225	2.25	14.6	18	29.4	49	3	0.5	●	8,120
AQRVDR0226	2.26	14.6	18	29.4	49	3	0.5	□	—
AQRVDR0227	2.27	14.6	18	29.4	49	3	0.5	□	—
AQRVDR0228	2.28	14.6	18	29.4	49	3	0.5	●	8,120
AQRVDR0229	2.29	14.6	18	29.4	49	3	0.5	□	—
AQRVDR0230	2.3	14.6	18	29.4	49	3	0.5	●	8,120
AQRVDR0231	2.31	14.5	18	29.4	49	3	0.5	□	—
AQRVDR0232	2.32	14.5	18	29.4	49	3	0.5	□	—
AQRVDR0233	2.33	14.5	18	29.4	49	3	0.5	●	8,120
AQRVDR0234	2.34	14.5	18	29.4	49	3	0.5	□	—
AQRVDR0235	2.35	14.5	18	29.4	49	3	0.5	●	8,120
AQRVDR0236	2.36	14.5	18	29.4	49	3	0.5	□	—
AQRVDR0237	2.37	14.4	18	29.5	49	3	0.5	□	—
AQRVDR0238	2.38	14.4	18	29.5	49	3	0.5	□	—
AQRVDR0239	2.39	14.4	18	29.5	49	3	0.5	□	—
AQRVDR0240	2.4	14.4	18	29.5	49	3	0.5	●	8,120
AQRVDR0241	2.41	14.4	18	29.5	49	3	0.5	□	—
AQRVDR0242	2.42	14.4	18	29.5	49	3	0.5	□	—
AQRVDR0243	2.43	14.4	18	29.5	49	3	0.5	□	—
AQRVDR0244	2.44	14.3	18	29.5	49	3	0.5	□	—
AQRVDR0245	2.45	14.3	18	29.5	49	3	0.5	●	8,120
AQRVDR0246	2.46	14.3	18	29.5	49	3	0.5	□	—
AQRVDR0247	2.47	14.3	18	29.5	49	3	0.5	□	—
AQRVDR0248	2.48	14.3	18	29.5	49	3	0.5	□	—
AQRVDR0249	2.49	14.3	18	29.6	49	3	0.5	□	—
AQRVDR0250	2.5	14.3	18	29.6	49	3	0.5	●	8,120

単位 (Unit):mm

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price(¥)
AQRVDR0251	2.51	16.2	20	29.6	49	3	0.5	□	—
AQRVDR0252	2.52	16.2	20	29.6	49	3	0.5	□	—
AQRVDR0253	2.53	16.2	20	29.6	49	3	0.5	□	—
AQRVDR0254	2.54	16.2	20	29.6	49	3	0.5	□	—
AQRVDR0255	2.55	16.2	20	27.6	49	3	0.5	●	8,120
AQRVDR0256	2.56	16.2	20	29.6	49	3	0.5	□	—
AQRVDR0257	2.57	16.1	20	29.6	49	3	0.5	□	—
AQRVDR0258	2.58	16.1	20	29.6	49	3	0.5	□	—
AQRVDR0259	2.59	16.1	20	29.6	49	3	0.5	□	—
AQRVDR0260	2.6	16.1	20	27.7	49	3	0.5	●	8,120
AQRVDR0261	2.61	16.1	20	27.7	49	3	0.5	□	—
AQRVDR0262	2.62	16.1	20	27.7	49	3	0.5	□	—
AQRVDR0263	2.63	16.1	20	27.7	49	3	0.5	□	—
AQRVDR0264	2.64	16	20	27.7	49	3	0.5	□	—
AQRVDR0265	2.65	16	20	27.7	49	3	0.5	●	8,120
AQRVDR0266	2.66	16	20	27.7	49	3	0.6	□	—
AQRVDR0267	2.67	16	20	27.7	49	3	0.6	□	—
AQRVDR0268	2.68	16	20	27.7	49	3	0.6	□	—
AQRVDR0269	2.69	16	20	27.7	49	3	0.6	□	—
AQRVDR0270	2.7	16	20	27.7	49	3	0.6	●	8,120
AQRVDR0271	2.71	15.9	20	27.7	49	3	0.6	□	—
AQRVDR0272	2.72	15.9	20	27.8	49	3	0.6	□	—
AQRVDR0273	2.73	15.9	20	27.8	49	3	0.6	□	—
AQRVDR0274	2.74	15.9	20	27.8	49	3	0.6	□	—
AQRVDR0275	2.75	15.9	20	27.8	49	3	0.6	●	8,120
AQRVDR0276	2.76	15.9	20	27.8	49	3	0.6	●	8,120
AQRVDR0277	2.77	15.8	20	27.8	49	3	0.6	□	—
AQRVDR0278	2.78	15.8	20	27.8	49	3	0.6	●	8,120
AQRVDR0279	2.79	15.8	20	27.8	49	3	0.6	□	—
AQRVDR0280	2.8	15.8	20	27.8	49	3	0.6	●	8,120
AQRVDR0281	2.81	15.8	20	27.8	49	3	0.6	□	—
AQRVDR0282	2.82	15.8	20	27.8	49	3	0.6	□	—
AQRVDR0283	2.83	15.8	20	27.9	49	3	0.6	□	—
AQRVDR0284	2.84	15.7	20	27.9	49	3	0.6	□	—
AQRVDR0285	2.85	15.7	20	27.9	49	3	0.6	●	8,120
AQRVDR0286	2.86	15.7	20	27.9	49	3	0.6	□	—
AQRVDR0287	2.87	15.7	20	27.9	49	3	0.6	□	—
AQRVDR0288	2.88	15.7	20	27.9	49	3	0.6	□	—
AQRVDR0289	2.89	15.7	20	27.9	49	3	0.6	□	—
AQRVDR0290	2.9	15.7	20	27.9	49	3	0.6	●	8,120
AQRVDR0291	2.91	15.6	20	27.9	49	3	0.6	□	—
AQRVDR0292	2.92	15.6	20	27.9	49	3	0.6	□	—
AQRVDR0293	2.93	15.6	20	27.9	49	3	0.6	□	—
AQRVDR0294	2.94	15.6	20	27.9	49	3	0.6	□	—
AQRVDR0295	2.95	15.6	20	28	49	3	0.6	●	8,120
AQRVDR0296	2.96	15.6	20	28	49	3	0.6	□	—
AQRVDR0297	2.97	15.5	20	28	49	3	0.6	□	—
AQRVDR0298	2.98	15.5	20	28	49	3	0.6	□	—
AQRVDR0299	2.99	15.5	20	28	49	3	0.6	□	—
AQRVDR0300	3.0	15.5	20	28	49	3	0.6	●	8,120
AQRVDR0301	3.01	20.5	25	33.1	60	4	0.6	□	—

● 標準在庫品 □ 特定代理店在庫品 ※0.01mmサイズの直径許容差は0～-0.009mm

● Standard stock item □ Available for Japan customers only Tolerance of diameter is 0 to -0.009mm for 0.01mm size

AQRVDR

アクアREVOドリルレギュラ

AquaREVO Drills Regular

単位 (Unit):mm

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDR0302	3.02	20.5	25	33.2	60	4	0.6	□	—
AQRVDR0303	3.03	20.5	25	33.2	60	4	0.6	□	—
AQRVDR0304	3.04	20.4	25	33.2	60	4	0.6	□	—
AQRVDR0305	3.05	20.4	25	33.2	60	4	0.6	●	8,740
AQRVDR0306	3.06	20.4	25	33.2	60	4	0.6	□	—
AQRVDR0307	3.07	20.4	25	33.2	60	4	0.6	□	—
AQRVDR0308	3.08	20.4	25	33.2	60	4	0.6	□	—
AQRVDR0309	3.09	20.4	25	33.2	60	4	0.6	□	—
AQRVDR0310	3.1	20.4	25	33.2	60	4	0.6	●	8,740
AQRVDR0311	3.11	20.3	25	33.2	60	4	0.6	□	—
AQRVDR0312	3.12	20.3	25	33.2	60	4	0.6	□	—
AQRVDR0313	3.13	20.3	25	33.2	60	4	0.6	□	—
AQRVDR0314	3.14	20.3	25	33.3	60	4	0.7	□	—
AQRVDR0315	3.15	20.3	25	33.3	60	4	0.7	●	8,740
AQRVDR0316	3.16	20.3	25	33.3	60	4	0.7	□	—
AQRVDR0317	3.17	20.2	25	33.3	60	4	0.7	□	—
AQRVDR0318	3.18	20.2	25	33.3	60	4	0.7	□	—
AQRVDR0319	3.19	20.2	25	33.3	60	4	0.7	□	—
AQRVDR0320	3.2	20.2	25	33.3	60	4	0.7	●	8,740
AQRVDR0321	3.21	20.2	25	33.3	60	4	0.7	□	—
AQRVDR0322	3.22	20.2	25	33.3	60	4	0.7	□	—
AQRVDR0323	3.23	20.2	25	33.3	60	4	0.7	□	—
AQRVDR0324	3.24	20.1	25	33.3	60	4	0.7	□	—
AQRVDR0325	3.25	20.1	25	33.4	60	4	0.7	●	8,740
AQRVDR0326	3.26	20.1	25	33.4	60	4	0.7	□	—
AQRVDR0327	3.27	20.1	25	33.4	60	4	0.7	□	—
AQRVDR0328	3.28	20.1	25	33.4	60	4	0.7	□	—
AQRVDR0329	3.29	20.1	25	33.4	60	4	0.7	□	—
AQRVDR0330	3.3	20.1	25	33.4	60	4	0.7	●	8,740
AQRVDR0331	3.31	20	25	33.4	60	4	0.7	□	—
AQRVDR0332	3.32	20	25	33.4	60	4	0.7	□	—
AQRVDR0333	3.33	20	25	33.4	60	4	0.7	□	—
AQRVDR0334	3.34	20	25	33.4	60	4	0.7	□	—
AQRVDR0335	3.35	20	25	33.4	60	4	0.7	●	8,740
AQRVDR0336	3.36	20	25	33.4	60	4	0.7	□	—
AQRVDR0337	3.37	19.9	25	33.5	60	4	0.7	□	—
AQRVDR0338	3.38	19.9	25	33.5	60	4	0.7	□	—
AQRVDR0339	3.39	19.9	25	33.5	60	4	0.7	□	—
AQRVDR0340	3.4	19.9	25	33.5	60	4	0.7	●	8,740
AQRVDR0341	3.41	19.9	25	33.5	60	4	0.7	□	—
AQRVDR0342	3.42	19.9	25	33.5	60	4	0.7	□	—
AQRVDR0343	3.43	19.9	25	33.5	60	4	0.7	□	—
AQRVDR0344	3.44	19.8	25	33.5	60	4	0.7	□	—
AQRVDR0345	3.45	19.8	25	33.5	60	4	0.7	●	8,740
AQRVDR0346	3.46	19.8	25	33.5	60	4	0.7	□	—
AQRVDR0347	3.47	19.8	25	33.5	60	4	0.7	□	—
AQRVDR0348	3.48	19.8	25	33.5	60	4	0.7	□	—
AQRVDR0349	3.49	19.8	25	33.6	60	4	0.7	□	—
AQRVDR0350	3.5	19.8	25	33.6	60	4	0.7	●	8,740
AQRVDR0351	3.51	22.7	28	30.6	60	4	0.7	□	—
AQRVDR0352	3.52	22.7	28	30.6	60	4	0.7	□	—

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDR0353	3.53	22.7	28	30.6	60	4	0.7	□	—
AQRVDR0354	3.54	22.7	28	30.6	60	4	0.7	□	—
AQRVDR0355	3.55	22.7	28	30.6	60	4	0.7	●	9,190
AQRVDR0356	3.56	22.7	28	30.6	60	4	0.7	□	—
AQRVDR0357	3.57	22.6	28	30.6	60	4	0.7	□	—
AQRVDR0358	3.58	22.6	28	30.6	60	4	0.7	□	—
AQRVDR0359	3.59	22.6	28	30.6	60	4	0.7	□	—
AQRVDR0360	3.6	22.6	28	30.7	60	4	0.7	●	9,190
AQRVDR0361	3.61	22.6	28	30.7	60	4	0.7	□	—
AQRVDR0362	3.62	22.6	28	30.7	60	4	0.7	□	—
AQRVDR0363	3.63	22.6	28	30.7	60	4	0.8	□	—
AQRVDR0364	3.64	22.5	28	30.7	60	4	0.8	—	—
AQRVDR0365	3.65	22.5	28	30.7	60	4	0.8	●	9,190
AQRVDR0366	3.66	22.5	28	30.7	60	4	0.8	●	9,190
AQRVDR0367	3.67	22.5	28	30.7	60	4	0.8	□	—
AQRVDR0368	3.68	22.5	28	30.7	60	4	0.8	●	9,190
AQRVDR0369	3.69	22.5	28	30.7	60	4	0.8	□	—
AQRVDR0370	3.7	22.5	28	30.7	60	4	0.8	●	9,190
AQRVDR0371	3.71	22.4	28	30.7	60	4	0.8	□	—
AQRVDR0372	3.72	22.4	28	30.8	60	4	0.8	□	—
AQRVDR0373	3.73	22.4	28	30.8	60	4	0.8	□	—
AQRVDR0374	3.74	22.4	28	30.8	60	4	0.8	□	—
AQRVDR0375	3.75	22.4	28	30.8	60	4	0.8	●	9,190
AQRVDR0376	3.76	22.4	28	30.8	60	4	0.8	□	—
AQRVDR0377	3.77	22.3	28	30.8	60	4	0.8	□	—
AQRVDR0378	3.78	22.3	28	30.8	60	4	0.8	□	—
AQRVDR0379	3.79	22.3	28	30.8	60	4	0.8	□	—
AQRVDR0380	3.8	22.3	28	30.8	60	4	0.8	●	9,190
AQRVDR0381	3.81	22.3	28	30.8	60	4	0.8	□	—
AQRVDR0382	3.82	22.3	28	30.8	60	4	0.8	□	—
AQRVDR0383	3.83	22.3	28	30.9	60	4	0.8	□	—
AQRVDR0384	3.84	22.2	28	30.9	60	4	0.8	□	—
AQRVDR0385	3.85	22.2	28	30.9	60	4	0.8	●	9,190
AQRVDR0386	3.86	22.2	28	30.9	60	4	0.8	□	—
AQRVDR0387	3.87	22.2	28	30.9	60	4	0.8	□	—
AQRVDR0388	3.88	22.2	28	30.9	60	4	0.8	□	—
AQRVDR0389	3.89	22.2	28	30.9	60	4	0.8	□	—
AQRVDR0390	3.9	22.2	28	30.9	60	4	0.8	●	9,190
AQRVDR0391	3.91	22.1	28	30.9	60	4	0.8	□	—
AQRVDR0392	3.92	22.1	28	30.9	60	4	0.8	□	—
AQRVDR0393	3.93	22.1	28	30.9	60	4	0.8	□	—
AQRVDR0394	3.94	22.1	28	30.9	60	4	0.8	□	—
AQRVDR0395	3.95	22.1	28	31	60	4	0.8	●	9,190
AQRVDR0396	3.96	22.1	28	31	60	4	0.8	□	—
AQRVDR0397	3.97	22	28	31	60	4	0.8	□	—
AQRVDR0398	3.98	22	28	31	60	4	0.8	□	—
AQRVDR0399	3.99	22	28	31	60	4	0.8	□	—
AQRVDR0400	4.0	22	28	31	60	4	0.8	●	9,190
AQRVDR0401	4.01	26	32	43.1	77	5	0.8	□	—
AQRVDR0402	4.02	26	32	43.2	77	5	0.8	□	—
AQRVDR0403	4.03	26	32	43.2	77	5	0.8	□	—

● 標準在庫品 □ 特定代理店在庫品 ※0.01mmサイズの直径許容差は0～-0.009mm

● Standard stock item □ Available for Japan customers only Tolerance of diameter is 0 to -0.009mm for 0.01mm size

単位 (Unit):mm

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDR0404	4.04	25.9	32	43.2	77	5	0.8	□	—
AQRVDR0405	4.05	25.9	32	43.2	77	5	0.8	●	9,870
AQRVDR0406	4.06	25.9	32	43.2	77	5	0.8	□	—
AQRVDR0407	4.07	25.9	32	43.2	77	5	0.8	□	—
AQRVDR0408	4.08	25.9	32	43.2	77	5	0.8	□	—
AQRVDR0409	4.09	25.9	32	43.2	77	5	0.8	□	—
AQRVDR0410	4.1	25.9	32	43.2	77	5	0.8	●	9,870
AQRVDR0411	4.11	25.8	32	43.2	77	5	0.9	□	—
AQRVDR0412	4.12	25.8	32	43.2	77	5	0.9	□	—
AQRVDR0413	4.13	25.8	32	43.2	77	5	0.9	□	—
AQRVDR0414	4.14	25.8	32	43.3	77	5	0.9	□	—
AQRVDR0415	4.15	25.8	32	43.3	77	5	0.9	●	9,870
AQRVDR0416	4.16	25.8	32	43.3	77	5	0.9	□	—
AQRVDR0417	4.17	25.7	32	43.3	77	5	0.9	□	—
AQRVDR0418	4.18	25.7	32	43.3	77	5	0.9	□	—
AQRVDR0419	4.19	25.7	32	43.3	77	5	0.9	□	—
AQRVDR0420	4.2	25.7	32	43.3	77	5	0.9	●	9,870
AQRVDR0421	4.21	25.7	32	43.3	77	5	0.9	□	—
AQRVDR0422	4.22	25.7	32	43.3	77	5	0.9	□	—
AQRVDR0423	4.23	25.7	32	43.3	77	5	0.9	□	—
AQRVDR0424	4.24	25.6	32	43.3	77	5	0.9	□	—
AQRVDR0425	4.25	25.6	32	43.4	77	5	0.9	●	9,870
AQRVDR0426	4.26	25.6	32	43.4	77	5	0.9	□	—
AQRVDR0427	4.27	25.6	32	43.4	77	5	0.9	□	—
AQRVDR0428	4.28	25.6	32	43.4	77	5	0.9	□	—
AQRVDR0429	4.29	25.6	32	43.4	77	5	0.9	□	—
AQRVDR0430	4.3	25.6	32	43.4	77	5	0.9	●	9,870
AQRVDR0431	4.31	25.5	32	43.4	77	5	0.9	□	—
AQRVDR0432	4.32	25.5	32	43.4	77	5	0.9	□	—
AQRVDR0433	4.33	25.5	32	43.4	77	5	0.9	□	—
AQRVDR0434	4.34	25.5	32	43.4	77	5	0.9	□	—
AQRVDR0435	4.35	25.5	32	43.4	77	5	0.9	●	9,870
AQRVDR0436	4.36	25.5	32	43.4	77	5	0.9	□	—
AQRVDR0437	4.37	25.4	32	43.5	77	5	0.9	□	—
AQRVDR0438	4.38	25.4	32	43.5	77	5	0.9	□	—
AQRVDR0439	4.39	25.4	32	43.5	77	5	0.9	□	—
AQRVDR0440	4.4	25.4	32	43.5	77	5	0.9	●	9,870
AQRVDR0441	4.41	25.4	32	43.5	77	5	0.9	□	—
AQRVDR0442	4.42	25.4	32	43.5	77	5	0.9	□	—
AQRVDR0443	4.43	25.4	32	43.5	77	5	0.9	□	—
AQRVDR0444	4.44	25.3	32	43.5	77	5	0.9	□	—
AQRVDR0445	4.45	25.3	32	43.5	77	5	0.9	●	9,870
AQRVDR0446	4.46	25.3	32	43.5	77	5	0.9	□	—
AQRVDR0447	4.47	25.3	32	43.5	77	5	0.9	□	—
AQRVDR0448	4.48	25.3	32	43.5	77	5	0.9	□	—
AQRVDR0449	4.49	25.3	32	43.6	77	5	0.9	□	—
AQRVDR0450	4.5	25.3	32	43.6	77	5	0.9	●	9,870
AQRVDR0451	4.51	32.2	39	36.6	77	5	0.9	□	—
AQRVDR0452	4.52	32.2	39	36.6	77	5	0.9	□	—
AQRVDR0453	4.53	32.2	39	36.6	77	5	0.9	□	—
AQRVDR0454	4.54	32.2	39	36.6	77	5	0.9	□	—

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDR0455	4.55	32.2	39	36.6	77	5	0.9	●	10,500
AQRVDR0456	4.56	32.2	39	36.6	77	5	0.9	□	—
AQRVDR0457	4.57	32.1	39	36.6	77	5	0.9	□	—
AQRVDR0458	4.58	32.1	39	36.6	77	5	0.9	□	—
AQRVDR0459	4.59	32.1	39	36.6	77	5	1	□	—
AQRVDR0460	4.6	32.1	39	36.7	77	5	1	●	10,500
AQRVDR0461	4.61	32.1	39	36.7	77	5	1	□	—
AQRVDR0462	4.62	32.1	39	36.7	77	5	1	●	10,500
AQRVDR0463	4.63	32.1	39	36.7	77	5	1	□	—
AQRVDR0464	4.64	32	39	36.7	77	5	1	●	10,500
AQRVDR0465	4.65	32	39	36.7	77	5	1	●	10,500
AQRVDR0466	4.66	32	39	36.7	77	5	1	□	—
AQRVDR0467	4.67	32	39	36.7	77	5	1	□	—
AQRVDR0468	4.68	32	39	36.7	77	5	1	□	—
AQRVDR0469	4.69	32	39	36.7	77	5	1	□	—
AQRVDR0470	4.7	32	39	36.7	77	5	1	●	10,500
AQRVDR0471	4.71	31.9	39	36.7	77	5	1	□	—
AQRVDR0472	4.72	31.9	39	36.8	77	5	1	□	—
AQRVDR0473	4.73	31.9	39	36.8	77	5	1	□	—
AQRVDR0474	4.74	31.9	39	36.8	77	5	1	□	—
AQRVDR0475	4.75	31.9	39	36.8	77	5	1	●	10,500
AQRVDR0476	4.76	31.9	39	36.8	77	5	1	□	—
AQRVDR0477	4.77	31.8	39	36.8	77	5	1	□	—
AQRVDR0478	4.78	31.8	39	36.8	77	5	1	□	—
AQRVDR0479	4.79	31.8	39	36.8	77	5	1	□	—
AQRVDR0480	4.8	31.8	39	36.8	77	5	1	●	10,500
AQRVDR0481	4.81	31.8	39	36.8	77	5	1	□	—
AQRVDR0482	4.82	31.8	39	36.8	77	5	1	□	—
AQRVDR0483	4.83	31.8	39	36.9	77	5	1	□	—
AQRVDR0484	4.84	31.7	39	36.9	77	5	1	□	—
AQRVDR0485	4.85	31.7	39	36.9	77	5	1	●	10,500
AQRVDR0486	4.86	31.7	39	36.9	77	5	1	□	—
AQRVDR0487	4.87	31.7	39	36.9	77	5	1	□	—
AQRVDR0488	4.88	31.7	39	36.9	77	5	1	□	—
AQRVDR0489	4.89	31.7	39	36.9	77	5	1	□	—
AQRVDR0490	4.9	31.7	39	36.9	77	5	1	●	10,500
AQRVDR0491	4.91	31.6	39	36.9	77	5	1	□	—
AQRVDR0492	4.92	31.6	39	36.9	77	5	1	□	—
AQRVDR0493	4.93	31.6	39	36.9	77	5	1	□	—
AQRVDR0494	4.94	31.6	39	36.9	77	5	1	□	—
AQRVDR0495	4.95	31.6	39	37	77	5	1	●	10,500
AQRVDR0496	4.96	31.6	39	37	77	5	1	□	—
AQRVDR0497	4.97	31.5	39	37	77	5	1	□	—
AQRVDR0498	4.98	31.5	39	37	77	5	1	□	—
AQRVDR0499	4.99	31.5	39	37	77	5	1	□	—
AQRVDR0500	5.0	31.5	39	37	77	5	1	●	10,500
AQRVDR0501	5.01	32.5	40	40.1	82	6	1	□	—
AQRVDR0502	5.02	32.5	40	40.2	82	6	1	□	—
AQRVDR0503	5.03	32.5	40	40.2	82	6	1	□	—
AQRVDR0504	5.04	32.4	40	40.2	82	6	1	□	—
AQRVDR0505	5.05	32.4	40	40.2	82	6	1	●	11,100

● 標準在庫品 □ 特定代理店在庫品 ※0.01mmサイズの直径許容差は0～-0.009mm
 ● Standard stock item □ Available for Japan customers only Tolerance of diameter is 0 to -0.009mm for 0.01mm size

AQRVDR

アクアREVOドリルレギュラ

AquaREVO Drills Regular

単位 (Unit):mm

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price(¥)
AQRVDR0506	5.06	32.4	40	40.2	82	6	1	□	—
AQRVDR0507	5.07	32.4	40	40.2	82	6	1.1	□	—
AQRVDR0508	5.08	32.4	40	40.2	82	6	1.1	□	—
AQRVDR0509	5.09	32.4	40	40.2	82	6	1.1	□	—
AQRVDR0510	5.1	32.4	40	40.2	82	6	1.1	●	11,100
AQRVDR0511	5.11	32.3	40	40.2	82	6	1.1	□	—
AQRVDR0512	5.12	32.3	40	40.2	82	6	1.1	□	—
AQRVDR0513	5.13	32.3	40	40.2	82	6	1.1	□	—
AQRVDR0514	5.14	32.3	40	40.3	82	6	1.1	□	—
AQRVDR0515	5.15	32.3	40	40.3	82	6	1.1	●	11,100
AQRVDR0516	5.16	32.3	40	40.3	82	6	1.1	□	—
AQRVDR0517	5.17	32.2	40	40.3	82	6	1.1	□	—
AQRVDR0518	5.18	32.2	40	40.3	82	6	1.1	□	—
AQRVDR0519	5.19	32.2	40	40.3	82	6	1.1	□	—
AQRVDR0520	5.2	32.2	40	40.3	82	6	1.1	●	11,100
AQRVDR0521	5.21	32.2	40	40.3	82	6	1.1	□	—
AQRVDR0522	5.22	32.2	40	40.3	82	6	1.1	□	—
AQRVDR0523	5.23	32.2	40	40.3	82	6	1.1	□	—
AQRVDR0524	5.24	32.1	40	40.3	82	6	1.1	□	—
AQRVDR0525	5.25	32.1	40	40.4	82	6	1.1	●	11,100
AQRVDR0526	5.26	32.1	40	40.4	82	6	1.1	□	—
AQRVDR0527	5.27	32.1	40	40.4	82	6	1.1	□	—
AQRVDR0528	5.28	32.1	40	40.4	82	6	1.1	□	—
AQRVDR0529	5.29	32.1	40	40.4	82	6	1.1	□	—
AQRVDR0530	5.3	32.1	40	40.4	82	6	1.1	●	11,100
AQRVDR0531	5.31	32	40	40.4	82	6	1.1	□	—
AQRVDR0532	5.32	32	40	40.4	82	6	1.1	□	—
AQRVDR0533	5.33	32	40	40.4	82	6	1.1	□	—
AQRVDR0534	5.34	32	40	40.4	82	6	1.1	□	—
AQRVDR0535	5.35	32	40	40.4	82	6	1.1	●	11,100
AQRVDR0536	5.36	32	40	40.4	82	6	1.1	□	—
AQRVDR0537	5.37	31.9	40	40.5	82	6	1.1	□	—
AQRVDR0538	5.38	31.9	40	40.5	82	6	1.1	□	—
AQRVDR0539	5.39	31.9	40	40.5	82	6	1.1	□	—
AQRVDR0540	5.4	31.9	40	40.5	82	6	1.1	●	11,100
AQRVDR0541	5.41	31.9	40	40.5	82	6	1.1	□	—
AQRVDR0542	5.42	31.9	40	40.5	82	6	1.1	□	—
AQRVDR0543	5.43	31.9	40	40.5	82	6	1.1	□	—
AQRVDR0544	5.44	31.8	40	40.5	82	6	1.1	□	—
AQRVDR0545	5.45	31.8	40	40.5	82	6	1.1	●	11,100
AQRVDR0546	5.46	31.8	40	40.5	82	6	1.1	□	—
AQRVDR0547	5.47	31.8	40	40.5	82	6	1.1	□	—
AQRVDR0548	5.48	31.8	40	40.5	82	6	1.1	□	—
AQRVDR0549	5.49	31.8	40	40.6	82	6	1.1	□	—
AQRVDR0550	5.5	31.8	40	40.6	82	6	1.1	●	11,100
AQRVDR0551	5.51	33.7	42	38.6	82	6	1.1	□	—
AQRVDR0552	5.52	33.7	42	38.6	82	6	1.1	●	11,700
AQRVDR0553	5.53	33.7	42	38.6	82	6	1.1	□	—
AQRVDR0554	5.54	33.7	42	38.6	82	6	1.1	●	11,700
AQRVDR0555	5.55	33.7	42	38.6	82	6	1.1	●	11,700
AQRVDR0556	5.56	33.7	42	38.6	82	6	1.2	□	—

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price(¥)
AQRVDR0557	5.57	33.6	42	38.6	82	6	1.2	●	11,700
AQRVDR0558	5.58	33.6	42	38.6	82	6	1.2	□	—
AQRVDR0559	5.59	33.6	42	38.6	82	6	1.2	□	—
AQRVDR0560	5.6	33.6	42	38.7	82	6	1.2	●	11,700
AQRVDR0561	5.61	33.6	42	38.7	82	6	1.2	□	—
AQRVDR0562	5.62	33.6	42	38.7	82	6	1.2	□	—
AQRVDR0563	5.63	33.6	42	38.7	82	6	1.2	□	—
AQRVDR0564	5.64	33.5	42	38.7	82	6	1.2	□	—
AQRVDR0565	5.65	33.5	42	38.7	82	6	1.2	●	11,700
AQRVDR0566	5.66	33.5	42	38.7	82	6	1.2	□	—
AQRVDR0567	5.67	33.5	42	38.7	82	6	1.2	□	—
AQRVDR0568	5.68	33.5	42	38.7	82	6	1.2	□	—
AQRVDR0569	5.69	33.5	42	38.7	82	6	1.2	□	—
AQRVDR0570	5.7	33.5	42	38.7	82	6	1.2	●	11,700
AQRVDR0571	5.71	33.4	42	38.7	82	6	1.2	□	—
AQRVDR0572	5.72	33.4	42	38.8	82	6	1.2	□	—
AQRVDR0573	5.73	33.4	42	38.8	82	6	1.2	□	—
AQRVDR0574	5.74	33.4	42	38.8	82	6	1.2	□	—
AQRVDR0575	5.75	33.4	42	38.8	82	6	1.2	●	11,700
AQRVDR0576	5.76	33.4	42	38.8	82	6	1.2	□	—
AQRVDR0577	5.77	33.3	42	38.8	82	6	1.2	□	—
AQRVDR0578	5.78	33.3	42	38.8	82	6	1.2	□	—
AQRVDR0579	5.79	33.3	42	38.8	82	6	1.2	□	—
AQRVDR0580	5.8	33.3	42	38.8	82	6	1.2	●	11,700
AQRVDR0581	5.81	33.3	42	38.8	82	6	1.2	□	—
AQRVDR0582	5.82	33.3	42	38.8	82	6	1.2	□	—
AQRVDR0583	5.83	33.3	42	38.9	82	6	1.2	□	—
AQRVDR0584	5.84	33.2	42	38.9	82	6	1.2	□	—
AQRVDR0585	5.85	33.2	42	38.9	82	6	1.2	●	11,700
AQRVDR0586	5.86	33.2	42	38.9	82	6	1.2	□	—
AQRVDR0587	5.87	33.2	42	38.9	82	6	1.2	□	—
AQRVDR0588	5.88	33.2	42	38.9	82	6	1.2	□	—
AQRVDR0589	5.89	33.2	42	38.9	82	6	1.2	□	—
AQRVDR0590	5.9	33.2	42	38.9	82	6	1.2	●	11,700
AQRVDR0591	5.91	33.1	42	38.9	82	6	1.2	□	—
AQRVDR0592	5.92	33.1	42	38.9	82	6	1.2	□	—
AQRVDR0593	5.93	33.1	42	38.9	82	6	1.2	□	—
AQRVDR0594	5.94	33.1	42	38.9	82	6	1.2	□	—
AQRVDR0595	5.95	33.1	42	39	82	6	1.2	●	11,700
AQRVDR0596	5.96	33.1	42	39	82	6	1.2	□	—
AQRVDR0597	5.97	33	42	39	82	6	1.2	□	—
AQRVDR0598	5.98	33	42	39	82	6	1.2	□	—
AQRVDR0599	5.99	33	42	39	82	6	1.2	□	—
AQRVDR0600	6.0	33	42	39	82	6	1.2	●	11,700
AQRVDR0610	6.1	33.9	43	39.2	84	7	1.3	●	11,700
AQRVDR0620	6.2	33.7	43	39.3	84	7	1.3	●	11,700
AQRVDR0630	6.3	33.6	43	39.4	84	7	1.3	●	11,700
AQRVDR0640	6.4	33.4	43	39.5	84	7	1.3	●	11,700
AQRVDR0650	6.5	33.3	43	39.6	84	7	1.3	●	11,700
AQRVDR0660	6.6	34.1	44	38.7	84	7	1.4	●	12,400
AQRVDR0670	6.7	34	44	38.7	84	7	1.4	●	12,400

● 標準在庫品 □ 特定代理店在庫品 ※0.01mmサイズの直径許容差は0～-0.009mm

● Standard stock item □ Available for Japan customers only Tolerance of diameter is 0 to -0.009mm for 0.01mm size

単位 (Unit):mm

商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDR0680	6.8	33.8	44	38.8	84	7	1.4	●	12,400
AQRVDR0690	6.9	33.7	44	38.9	84	7	1.4	●	12,400
AQRVDR0700	7.0	33.5	44	39	84	7	1.4	●	12,400
AQRVDR0710	7.1	35.4	46	43.2	91	8	1.5	●	13,200
AQRVDR0720	7.2	35.2	46	43.3	91	8	1.5	●	13,200
AQRVDR0730	7.3	35.1	46	43.4	91	8	1.5	●	13,200
AQRVDR0740	7.4	34.9	46	43.5	91	8	1.5	●	13,200
AQRVDR0750	7.5	34.8	46	43.6	91	8	1.6	●	13,200
AQRVDR0760	7.6	35.6	47	42.7	91	8	1.6	●	13,800
AQRVDR0770	7.7	35.5	47	42.7	91	8	1.6	●	13,800
AQRVDR0780	7.8	35.3	47	42.8	91	8	1.6	●	13,800
AQRVDR0790	7.9	35.2	47	42.9	91	8	1.6	●	13,800
AQRVDR0800	8.0	35	47	43	91	8	1.7	●	13,800
AQRVDR0810	8.1	42.9	55	42.2	99	9	1.7	●	14,700
AQRVDR0820	8.2	42.7	55	42.3	99	9	1.7	●	14,700
AQRVDR0830	8.3	42.6	55	42.4	99	9	1.7	●	14,700
AQRVDR0840	8.4	42.4	55	42.5	99	9	1.7	●	14,700
AQRVDR0850	8.5	42.3	55	42.6	99	9	1.8	●	14,700
AQRVDR0860	8.6	44.1	57	40.7	99	9	1.8	●	15,200
AQRVDR0870	8.7	44	57	40.7	99	9	1.8	●	15,200
AQRVDR0880	8.8	43.8	57	40.8	99	9	1.8	●	15,200
AQRVDR0890	8.9	43.7	57	40.9	99	9	1.8	●	15,200
AQRVDR0900	9.0	43.5	57	41	99	9	1.9	●	15,200
AQRVDR0910	9.1	46.4	60	45.2	107	10	1.9	●	16,000
AQRVDR0920	9.2	46.2	60	45.3	107	10	1.9	●	16,000
AQRVDR0930	9.3	46.1	60	45.4	107	10	1.9	●	16,000
AQRVDR0940	9.4	45.9	60	45.5	107	10	1.9	●	16,000
AQRVDR0950	9.5	45.8	60	45.6	107	10	2	●	16,000
AQRVDR0960	9.6	47.6	62	43.7	107	10	2	●	16,700
AQRVDR0970	9.7	47.5	62	43.7	107	10	2	●	16,700
AQRVDR0980	9.8	47.3	62	43.8	107	10	2	●	16,700
AQRVDR0990	9.9	47.2	62	43.9	107	10	2.1	●	16,700
AQRVDR1000	10.0	47	62	44	107	10	2.1	●	16,700
AQRVDR1010	10.1	52.9	68	46.2	116	11	2.1	●	17,300
AQRVDR1020	10.2	52.7	68	46.3	116	11	2.1	●	17,300
AQRVDR1030	10.3	52.6	68	46.4	116	11	2.1	●	17,300
AQRVDR1040	10.4	52.4	68	46.5	116	11	2.2	●	17,300
AQRVDR1050	10.5	52.3	68	46.6	116	11	2.2	●	17,300
AQRVDR1060	10.6	54.1	70	44.7	116	11	2.2	●	18,200
AQRVDR1070	10.7	54	70	44.7	116	11	2.2	●	18,200
AQRVDR1080	10.8	53.8	70	44.8	116	11	2.2	●	18,200
AQRVDR1090	10.9	53.7	70	44.9	116	11	2.3	●	18,200
AQRVDR1100	11.0	53.5	70	45	116	11	2.3	●	18,200
AQRVDR1110	11.1	56.4	73	48.2	123	12	2.3	●	18,900
AQRVDR1120	11.2	56.2	73	48.3	123	12	2.3	●	18,900
AQRVDR1130	11.3	56.1	73	48.4	123	12	2.3	●	18,900
AQRVDR1140	11.4	55.9	73	48.5	123	12	2.4	●	18,900
AQRVDR1150	11.5	55.8	73	48.6	123	12	2.4	●	18,900
AQRVDR1160	11.6	58.6	76	45.7	123	12	2.4	●	19,500
AQRVDR1170	11.7	58.5	76	45.7	123	12	2.4	●	19,500
AQRVDR1180	11.8	58.3	76	45.8	123	12	2.4	●	19,500


商品記号	直径	有効長	溝長	シャンク長	全長	シャンク径	先端	在庫	参考価格(円)
Code	DC	LU	LCF	LS	OAL	DCONMS	PL	Stock	Price(¥)
AQRVDR1190	11.9	58.2	76	45.9	123	12	2.5	●	19,500
AQRVDR1200	12.0	58	76	46	123	12	2.5	●	19,500
AQRVDR1210	12.1	60.9	79	57.2	138	13	2.5	●	20,200
AQRVDR1220	12.2	60.7	79	57.3	138	13	2.5	●	20,200
AQRVDR1230	12.3	60.6	79	57.4	138	13	2.5	●	20,200
AQRVDR1240	12.4	60.4	79	57.5	138	13	2.6	●	20,200
AQRVDR1250	12.5	60.3	79	57.6	138	13	2.6	●	20,200
AQRVDR1260	12.6	62.1	81	55.7	138	13	2.6	●	20,800
AQRVDR1270	12.7	62	81	55.7	138	13	2.6	●	20,800
AQRVDR1280	12.8	61.8	81	55.8	138	13	2.7	●	20,800
AQRVDR1290	12.9	61.7	81	55.9	138	13	2.7	●	20,800
AQRVDR1300	13.0	61.5	81	56	138	13	2.7	●	20,800
AQRVDR1310	13.1	67.4	87	59.2	148	14	2.7	●	21,600
AQRVDR1320	13.2	67.2	87	59.3	148	14	2.7	●	21,600
AQRVDR1330	13.3	67.1	87	59.4	148	14	2.8	●	21,600
AQRVDR1340	13.4	66.9	87	59.5	148	14	2.8	●	21,600
AQRVDR1350	13.5	66.8	87	59.6	148	14	2.8	●	21,600
AQRVDR1360	13.6	69.6	90	56.7	148	14	2.8	●	22,300
AQRVDR1370	13.7	69.5	90	56.7	148	14	2.8	●	22,300
AQRVDR1380	13.8	69.3	90	56.8	148	14	2.9	●	22,300
AQRVDR1390	13.9	69.2	90	56.9	148	14	2.9	●	22,300
AQRVDR1400	14.0	69	90	57	148	14	2.9	●	22,300
AQRVDR1410	14.1	70.9	92	60.2	154	15	2.9	●	22,900
AQRVDR1420	14.2	70.7	92	60.3	154	15	2.9	●	22,900
AQRVDR1430	14.3	70.6	92	60.4	154	15	3	●	22,900
AQRVDR1440	14.4	70.4	92	60.5	154	15	3	●	22,900
AQRVDR1450	14.5	70.3	92	60.6	154	15	3	●	22,900
AQRVDR1460	14.6	72.1	94	58.7	154	15	3	●	23,700
AQRVDR1470	14.7	72	94	58.7	154	15	3	●	23,700
AQRVDR1480	14.8	71.8	94	58.8	154	15	3.1	●	23,700
AQRVDR1490	14.9	71.7	94	58.9	154	15	3.1	●	23,700
AQRVDR1500	15.0	71.5	94	59	154	15	3.1	●	23,700
AQRVDR1510	15.1	74.4	97	63.2	162	16	3.1	●	24,500
AQRVDR1520	15.2	74.2	97	63.3	162	16	3.1	●	24,500
AQRVDR1530	15.3	74.1	97	63.4	162	16	3.2	●	24,500
AQRVDR1540	15.4	73.9	97	63.5	162	16	3.2	●	24,500
AQRVDR1550	15.5	73.8	97	63.6	162	16	3.2	●	24,500
AQRVDR1560	15.6	75.6	99	61.7	162	16	3.2	●	25,100
AQRVDR1570	15.7	75.5	99	61.7	162	16	3.3	●	25,100
AQRVDR1580	15.8	75.3	99	61.8	162	16	3.3	●	25,100
AQRVDR1590	15.9	75.2	99	61.9	162	16	3.3	●	25,100
AQRVDR1600	16.0	75	99	62	162	16	3.3	●	25,100

● 標準在庫品 □ 特定代理店在庫品
 ※0.01mmサイズの直径許容差は0～-0.009mm
 ● Standard stock item □ Available for Japan customers only
 Tolerance of diameter is 0 to -0.009mm for 0.01mm size

AQRVDSL

アクアREVOドリルセミロング

AquaREVO Drills Semi-long

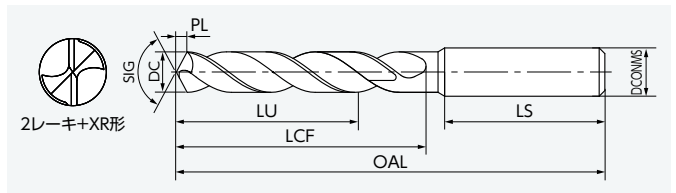

LIST 9870 オーダ方法 Order 商品記号 Code

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price(¥)
AQRVDSL0200	2.0	22	25	30.1	57	3	0.4	●	10,500
AQRVDSL0210	2.1	21.9	25	30.2	57	3	0.4	●	10,500
AQRVDSL0220	2.2	23.7	27	28.3	57	3	0.5	●	10,500
AQRVDSL0230	2.3	23.6	27	28.4	57	3	0.5	●	10,500
AQRVDSL0240	2.4	28.4	32	28.5	62	3	0.5	●	10,500
AQRVDSL0250	2.5	28.3	32	28.6	62	3	0.5	●	10,500
AQRVDSL0260	2.6	28.1	32	28.7	62	3	0.5	●	10,500
AQRVDSL0270	2.7	31	35	28.7	65	3	0.6	●	10,500
AQRVDSL0280	2.8	30.8	35	28.8	65	3	0.6	●	10,500
AQRVDSL0290	2.9	30.7	35	28.9	65	3	0.6	●	10,500
AQRVDSL0300	3.0	30.5	35	29	65	3	0.6	●	10,500
AQRVDSL0310	3.1	33.4	38	29.2	69	4	0.6	●	11,300
AQRVDSL0320	3.2	33.2	38	29.3	69	4	0.7	●	11,300
AQRVDSL0330	3.3	33.1	38	29.4	69	4	0.7	●	11,300
AQRVDSL0340	3.4	35.9	41	29.5	72	4	0.7	●	11,300
AQRVDSL0350	3.5	35.8	41	29.6	72	4	0.7	●	11,300
AQRVDSL0360	3.6	35.6	41	29.7	72	4	0.7	●	11,900
AQRVDSL0370	3.7	35.5	41	29.7	72	4	0.8	●	11,900
AQRVDSL0380	3.8	39.3	45	29.8	76	4	0.8	●	11,900
AQRVDSL0390	3.9	39.2	45	29.9	76	4	0.8	●	11,900
AQRVDSL0400	4.0	39	45	30	76	4	0.8	●	11,900
AQRVDSL0410	4.1	38.9	45	40.2	87	5	0.8	●	12,900
AQRVDSL0420	4.2	38.7	45	40.3	87	5	0.9	●	12,900
AQRVDSL0430	4.3	42.6	49	40.4	91	5	0.9	●	12,900
AQRVDSL0440	4.4	42.4	49	40.5	91	5	0.9	●	12,900
AQRVDSL0450	4.5	42.3	49	40.6	91	5	0.9	●	12,900
AQRVDSL0460	4.6	42.1	49	40.7	91	5	1	●	13,700
AQRVDSL0470	4.7	42	49	40.7	91	5	1	●	13,700
AQRVDSL0480	4.8	47.8	55	40.8	97	5	1	●	13,700
AQRVDSL0490	4.9	47.7	55	40.9	97	5	1	●	13,700
AQRVDSL0500	5.0	47.5	55	41	97	5	1	●	13,700
AQRVDSL0510	5.1	47.4	55	40.2	97	6	1.1	●	14,500
AQRVDSL0520	5.2	47.2	55	40.3	97	6	1.1	●	14,500
AQRVDSL0530	5.3	47.1	55	40.4	97	6	1.1	●	14,500
AQRVDSL0540	5.4	51.9	60	40.5	102	6	1.1	●	14,500
AQRVDSL0550	5.5	51.8	60	40.6	102	6	1.1	●	14,500
AQRVDSL0560	5.6	51.6	60	40.7	102	6	1.2	●	15,200
AQRVDSL0570	5.7	51.5	60	40.7	102	6	1.2	●	15,200
AQRVDSL0580	5.8	51.3	60	40.8	102	6	1.2	●	15,200
AQRVDSL0590	5.9	51.2	60	40.9	102	6	1.2	●	15,200
AQRVDSL0600	6.0	51	60	41	102	6	1.2	●	15,200
AQRVDSL0610	6.1	56.9	66	42.2	110	7	1.3	●	15,200
AQRVDSL0620	6.2	56.7	66	42.3	110	7	1.3	●	15,200
AQRVDSL0630	6.3	56.6	66	42.4	110	7	1.3	●	15,200
AQRVDSL0640	6.4	56.4	66	42.5	110	7	1.3	●	15,200
AQRVDSL0650	6.5	56.3	66	42.6	110	7	1.3	●	15,200
AQRVDSL0660	6.6	56.1	66	42.7	110	7	1.4	●	16,100
AQRVDSL0670	6.7	56	66	42.7	110	7	1.4	●	16,100
AQRVDSL0680	6.8	61.8	72	42.8	116	7	1.4	●	16,100
AQRVDSL0690	6.9	61.7	72	42.9	116	7	1.4	●	16,100
AQRVDSL0700	7.0	61.5	72	43	116	7	1.4	●	16,100
AQRVDSL0710	7.1	61.4	72	42.2	116	8	1.5	●	17,200
AQRVDSL0720	7.2	61.2	72	42.3	116	8	1.5	●	17,200
AQRVDSL0730	7.3	61.1	72	42.4	116	8	1.5	●	17,200
AQRVDSL0740	7.4	60.9	72	42.5	116	8	1.5	●	17,200

単位 (Unit):mm

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price(¥)
AQRVDSL0750	7.5	60.8	72	42.6	116	8	1.6	●	17,200
AQRVDSL0760	7.6	66.6	78	42.7	122	8	1.6	●	18,000
AQRVDSL0770	7.7	66.5	78	42.7	122	8	1.6	●	18,000
AQRVDSL0780	7.8	66.3	78	42.8	122	8	1.6	●	18,000
AQRVDSL0790	7.9	66.2	78	42.9	122	8	1.6	●	18,000
AQRVDSL0800	8.0	66	78	43	122	8	1.7	●	18,000
AQRVDSL0810	8.1	66.9	79	47.2	128	9	1.7	●	19,100
AQRVDSL0820	8.2	66.7	79	47.3	128	9	1.7	●	19,100
AQRVDSL0830	8.3	66.6	79	47.4	128	9	1.7	●	19,100
AQRVDSL0840	8.4	66.4	79	47.5	128	9	1.7	●	19,100
AQRVDSL0850	8.5	66.3	79	47.6	128	9	1.8	●	19,100
AQRVDSL0860	8.6	72.1	85	47.7	134	9	1.8	●	19,700
AQRVDSL0870	8.7	72	85	47.7	134	9	1.8	●	19,700
AQRVDSL0880	8.8	71.8	85	47.8	134	9	1.8	●	19,700
AQRVDSL0890	8.9	71.7	85	47.9	134	9	1.8	●	19,700
AQRVDSL0900	9.0	71.5	85	48	134	9	1.9	●	19,700
AQRVDSL0910	9.1	71.4	85	47.2	134	10	1.9	●	20,800
AQRVDSL0920	9.2	71.2	85	47.3	134	10	1.9	●	20,800
AQRVDSL0930	9.3	71.1	85	47.4	134	10	1.9	●	20,800
AQRVDSL0940	9.4	70.9	85	47.5	134	10	1.9	●	20,800
AQRVDSL0950	9.5	70.8	85	47.6	134	10	2	●	20,800
AQRVDSL0960	9.6	77.6	92	48.7	142	10	2	●	21,600
AQRVDSL0970	9.7	77.5	92	48.7	142	10	2	●	21,600
AQRVDSL0980	9.8	77.3	92	48.8	142	10	2	●	21,600
AQRVDSL0990	9.9	77.2	92	48.9	142	10	2.1	●	21,600
AQRVDSL1000	10.0	77	92	49	142	10	2.1	●	21,600
AQRVDSL1010	10.1	76.9	92	55.2	149	11	2.1	●	22,600
AQRVDSL1020	10.2	76.7	92	55.3	149	11	2.1	●	22,600
AQRVDSL1030	10.3	76.6	92	55.4	149	11	2.1	●	22,600
AQRVDSL1040	10.4	76.4	92	55.5	149	11	2.2	●	22,600
AQRVDSL1050	10.5	76.3	92	55.6	149	11	2.2	●	22,600
AQRVDSL1060	10.6	76.1	92	55.7	149	11	2.2	●	23,700
AQRVDSL1070	10.7	83	99	55.7	156	11	2.2	●	23,700
AQRVDSL1080	10.8	82.8	99	55.8	156	11	2.2	●	23,700
AQRVDSL1090	10.9	82.7	99	55.9	156	11	2.3	●	23,700
AQRVDSL1100	11.0	82.5	99	56	156	11	2.3	●	23,700
AQRVDSL1110	11.1	82.4	99	55.2	156	12	2.3	●	24,500
AQRVDSL1120	11.2	82.2	99	55.3	156	12	2.3	●	24,500
AQRVDSL1130	11.3	82.1	99	55.4	156	12	2.3	●	24,500
AQRVDSL1140	11.4	81.9	99	55.5	156	12	2.4	●	24,500
AQRVDSL1150	11.5	81.8	99	55.6	156	12	2.4	●	24,500
AQRVDSL1160	11.6	81.6	99	55.7	156	12	2.4	●	25,400
AQRVDSL1170	11.7	81.5	99	55.7	156	12	2.4	●	25,400
AQRVDSL1180	11.8	81.3	99	55.8	156	12	2.4	●	25,400
AQRVDSL1190	11.9	89.2	107	54.9	163	12	2.5	●	25,400
AQRVDSL1200	12.0	89	107	55	163	12	2.5	●	25,400
AQRVDSL1250	12.5	88.3	107	54.6	163	13	2.6	●	27,100
AQRVDSL1300	13.0	87.5	107	55	163	13	2.7	●	28,100
AQRVDSL1350	13.5	93.8	114	56.6	172	14	2.8	●	30,200
AQRVDSL1400	14.0	93	114	57	172	14	2.9	●	31,300
AQRVDSL1450	14.5	98.3	120	55.6	177	15	3	●	33,200
AQRVDSL1500	15.0	98.5	121	63	185	15	3.1	●	34,300
AQRVDSL1550	15.5	103.8	127	62.6	191	16	3.2	●	36,800
AQRVDSL1600	16.0	103	127	63	191	16	3.3	●	37,700


● 標準在庫品 Standard stock item

長寿命

Long tool life

外部給油でも切りくず排出性が良く、7D深穴加工が可能

Smooth chip evacuation even with external coolant, 7×DC deep hole drilling is possible

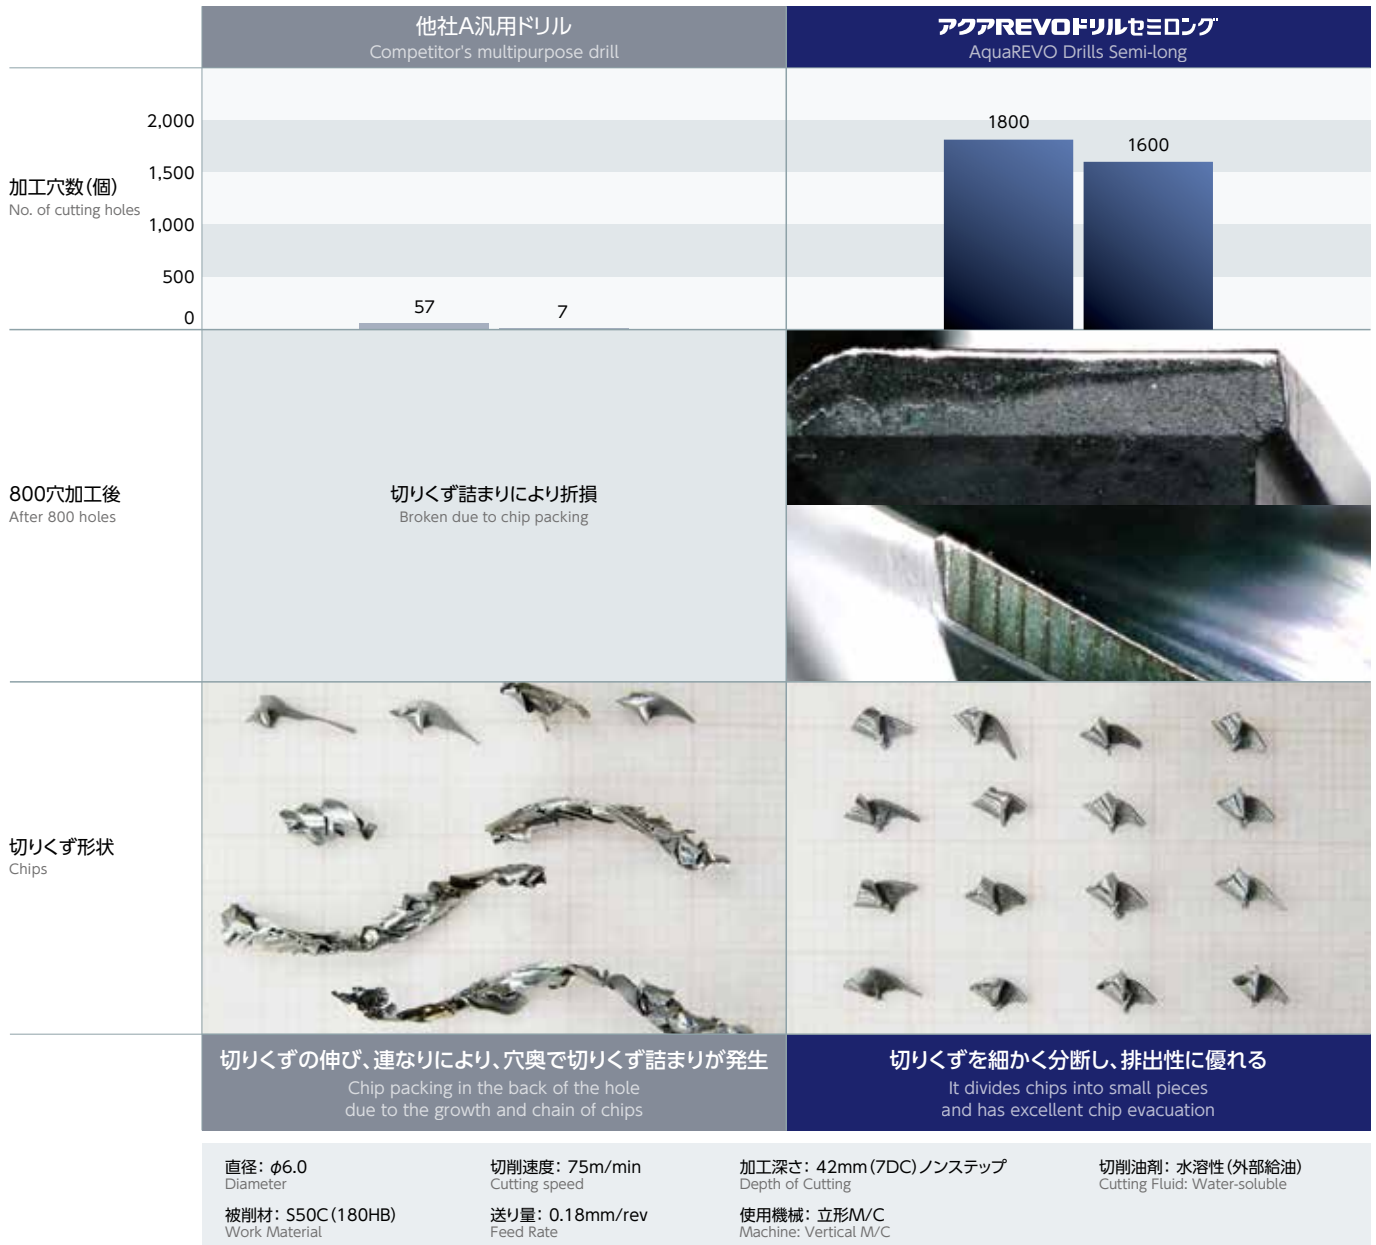

ISO13399に準拠した寸法記号について

- ISO13399は工具の電子データの世界共通化を目的とした国際規格です。
- 下記に示す通り、ISO13399に準拠した寸法記号での表記を開始しています。
- ISO13399 is an international standard aimed at universalizing the electronic data of tools.
- As shown below, we have started to use the designations that comply with ISO13399.

新記号	移行前記号	内容	英語
DC	Dc	直径	Cutting diameter
LCF	ℓ	溝長	Length chip flute
LU		有効長	Usable length
LS		シャンク長	Shank length
OAL	L	全長	Overall length
DCONMS	Ds	シャンク径	Connection diameter
PL		先端	Point length
SIG		先端角	Point angle

基準切削条件 Standard Cutting Conditions

被削材 Work Material	一般構造用鋼 炭素鋼、ねずみ錆鉄 SS400 S50C FC250 Structural Steel Carbon Steel, Cast Iron		合金鋼、調質鋼 SCM440 NAK Alloy Steel Heat Treated Steel		ダイス鋼 プリハードン鋼 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度鋼 Hardened Steel		ダクタイル鋳鉄 FCD400 Ductile Cast Iron		ステンレス鋼 SUS304 SUS316 Stainless Steel	
	～200HB		20～30HRC		30～40HRC		40～50HRC					
直径 Drill Dia. (mm)	回転数 Rotation (min ⁻¹)	送り速度 Feed (mm/min)	回転数 Rotation (min ⁻¹)	送り速度 Feed (mm/min)	回転数 Rotation (min ⁻¹)	送り速度 Feed (mm/min)	回転数 Rotation (min ⁻¹)	送り速度 Feed (mm/min)	回転数 Rotation (min ⁻¹)	送り速度 Feed (mm/min)	回転数 Rotation (min ⁻¹)	送り速度 Feed (mm/min)
AQRVDS アクアREVOドリルスタブ AquaREVO Drills Stub												
2.0	16000	1000	12700	800	7200	350	4800	190	12000	750	3200	140
3.0	10600	1100	8500	890	4800	390	3200	210	8000	830	2120	150
5.0	6400	1100	5100	890	2900	390	1900	210	4800	830	1280	150
8.0	4000	1100	3200	890	1800	390	1200	210	3000	830	800	150
10.0	3200	1050	2500	840	1400	380	1000	200	2400	800	640	150
12.0	2650	1000	2100	800	1200	350	800	190	2000	750	530	140
16.0	2000	890	1600	700	900	320	600	170	1500	660	400	120
AQRVDR アクアREVOドリルレギュラ AquaREVO Drills Regular												
2.0	16000	900	12700	720	7200	320	4800	170	12000	680	3200	130
3.0	10600	1000	8500	810	4800	360	3200	190	8000	760	2120	140
5.0	6400	1000	5100	810	2900	360	1900	190	4800	760	1280	140
8.0	4000	1000	3200	810	1800	350	1200	190	3000	760	800	140
10.0	3200	960	2500	760	1400	340	1000	180	2400	720	640	130
12.0	2650	900	2100	720	1200	310	800	170	2000	680	530	130
16.0	2000	810	1600	650	900	290	600	150	1500	600	400	110
AQRVDSL アクアREVOドリルセミロング AquaREVO Drills Semi-long												
2.0	12000	670	9550	540	5400	240	3660	130	8920	510	2400	95
3.0	8000	740	6370	610	3600	270	2440	145	5940	570	1600	105
5.0	4780	740	3820	610	2160	270	1460	145	3570	570	960	105
8.0	2980	740	2400	610	1350	260	920	145	2230	550	600	105
10.0	2400	720	1900	570	1080	260	730	135	1780	530	480	95
12.0	1990	675	1600	550	900	240	610	130	1480	500	400	95
16.0	1500	600	1200	480	680	220	460	110	1120	450	300	80

切削条件ご利用の注意

- 1) 機械剛性やワーククランプ、加工部形状などの状況により切削条件を調整してください。
- 2) 機械や加工物取り付けにおいて剛性がない場合、びびりが発生する場合は、上表の回転数と送り速度を同じ割合で下げてください。
- 3) ウェット加工は水溶性切削油剤を使用した場合です。
- 4) 不水溶性切削油剤の場合には回転数と送り速度を20%下げてください。
- 5) アルミニウム合金、軽金属、ステンレス鋼の加工には不向きです。
- 6) ステンレス鋼は、穴深さが2DCを超える場合はステップ加工を行ってください。
- 7) ドライ加工の場合、冷却及び切りくず除去のためエアブローを行ってください。
- 8) 高温の切りくずやドリル折損時の火花により火傷や火災の危険がありますので、防火対策を行ってください。
- 9) 被削材や加工条件により切りくず排出性が悪くなる事があります。その場合にはステップ送りをしてください。穴あけ深さ3DCを超える場合はステップ送りを推奨します。
- 10) ステップ送りは穴の上面まで戻してください。
- 11) ステップ量は0.5～1.0DCを目安にしてください。
- 12) ドリルの振れを0.02mm以下に、小径・高速切削の場合は0.01mm以下に抑えてチャッキングしてください。

Attention on using the cutting condition tables

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) In machine or installation of machining step, when there is no rigidity of machine or chattering occurs, reduce the rotation and feed rate.
- 3) Wet condition are for drilling with water soluble cutting fluid.
- 4) In non-water soluble cutting fluid, reduce the rotation and feed rate by 20%.
- 5) Drilling Aluminum Alloy, Light Metal, Stainless Steel are not recommended.
- 6) Drilling the step feed in Stainless Steel when hole depth more than 2xDC deep.
- 7) Use air blow for cooling and the chip exclusion in dry process.
- 8) By sparks during cutting, or heat by breakage, or hot chip, there is danger of fire. Take fire prevention measures.
- 9) A work material and cutting condition to chip removal may be worse. In that case, please step feed. It is recommended to step feeding for drilling depth of more than 3xDC.
- 10) Retraction of the step feed is to be returned to the top of the hole.
- 11) Step feed is recommended to 0.5～1.0xDC.
- 12) Please use the fixture to control the amplitude of the drill bit below 0.02mm, for small diameter, high-speed cutting control amplitude of the drill bit 0.01mm or less.

NACHI
株式会社 不二越

www.nachi-fujikoshi.co.jp

本社	Tel:03-5568-5111	Fax:03-5568-5206	東京都港区東新橋1-9-2 汐留住友ビル17F 〒105-0021					
富山事業所	Tel:076-423-5111	Fax:076-493-5211	富山市不二越本町1-1-1 〒930-8511					
東日本支社	Tel:03-5568-5285	Fax:03-5568-5293	中日本支社	Tel:052-769-6816	Fax:052-769-6828	关ナチ関東	Tel:03-5568-5190	Fax:03-5568-5195
北海道営業所	Tel:011-782-0006	Fax:011-782-0033	東海支店	Tel:053-454-4160	Fax:053-454-4845	关ナチ常盤	Tel:03-6252-3677	Fax:03-6252-3678
山形営業所	Tel:0237-71-0321	Fax:0237-72-5212	北陸支店	Tel:076-425-8013	Fax:076-492-4319	关ナチ東海	Tel:052-769-6911	Fax:052-769-6913
福島営業所	Tel:024-991-4511	Fax:024-935-1450	西日本支社	Tel:06-7178-5101	Fax:06-7178-5110	关ナチ北陸	Tel:076-424-3991	Fax:076-492-4319
北関東支店	Tel:0276-46-7511	Fax:0276-46-4599	中国四国支店	Tel:082-568-7460	Fax:082-568-7465	关ナチ関西	Tel:06-7178-2200	Fax:06-7178-2201
信州営業所	Tel:0268-28-7863	Fax:0268-21-1185	九州支店	Tel:092-441-2505	Fax:092-471-6600			